



Mobile Accessory Valves

Catalog HY14-2405/US



Contents

Series and Description	Page
CFD	
Technical Information	1
Ordering Information	1
Dimensions	2
CFDA	
Technical Information	3
Ordering Information	3
Dimensions	4
DC25	
Technical Information	5
Ordering Information	6
Dimensions	6
DS12, DS75	
Technical Information	7
Ordering Information	7
Dimensions	8
DWV	
Technical Information	9
Ordering Information	9
Dimensions	10
DXV	
Technical Information	11
Ordering Information	11
Dimensions	12
HP	
Technical Information	13
Ordering Information	14
Dimensions	15
Performance Curve	15

Continued on next page **WARNING**

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

Offer of Sale

The items described in this document are hereby offered for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. This offer and its acceptance are governed by the provisions stated in the "Offer of Sale".

Contents

Series and Description	Page
LO	
Technical Information	16
Ordering Information	16
Dimensions	17
LOA	
Technical Information	18
Ordering Information	18
Dimensions	19
PD and PDC	
Technical Information	20
Ordering Information	20
Dimensions	21
RPJL	
Technical Information	22
Ordering Information	22
Dimensions	23
Performance Curve	22
RPL	
Technical Information	24
Ordering Information	24
Dimensions	25
Performance Curve	24
S, H, SM and HM	
Technical Information	26
Ordering Information	27
Dimensions	28 - 29
Performance Curves	30
WJL	
Technical Information	31
Ordering Information	31
Dimensions	32
Performance Curves	32
Offer of Sale	33

General Description

Series CFD flow controls are a constant volume, priority-type flow control designed for power steering.

Operation

Flow enters the valve through the inlet. The spool orifice size is fixed and determines flow from the controlled flow port. When controlled flow demand is satisfied, the balance of the inlet flow passes through the excess flow port and returns to the tank. The excess flow port is not a work port and must not be pressurized. In addition, flow cannot be reversed through the excess flow port.



Flow through the controlled port can be reversed, but it is not pressure compensated.

Features

- Fixed flow rate
- Cross drilled spool provides extremely accurate metering
- Hardened metering spool
- High tensile, cast iron body

Specifications

Input Flow	56.25 LPM (15 GPM)
Operating Pressure SAE Ports NPTF Ports	177 Bar (2500 PSI) 138 Bar (2000 PSI)
Minimum Compensation Pressure	3.45 Bar (50 PSI)
Operating Temperature Range (Ambient)	Nitrile Seals: -40°C to +93°C (-40°F to +200°F)
Material	Body – High strength cast iron
Filtration	ISO Code 16/13 SAE Class 4 or better
Mounting Position	In-line; no restrictions

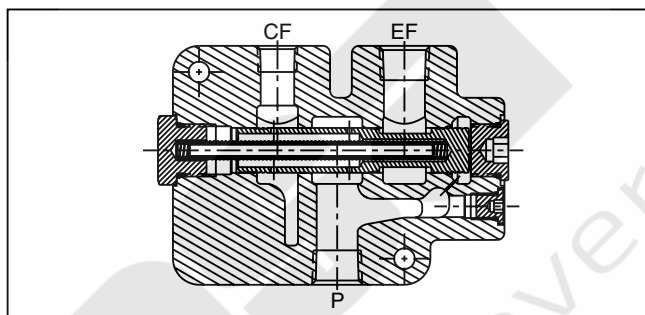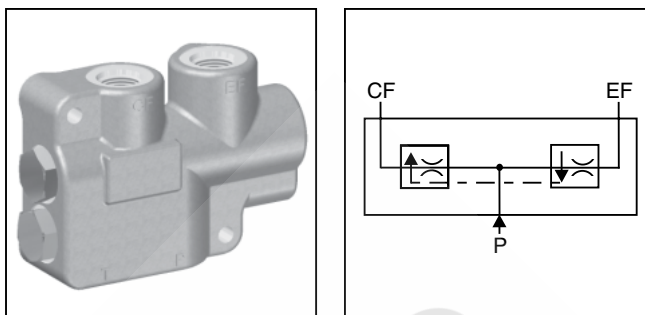

Ordering Information

CFD	—	Port Size	—	Controlled Flow
Constant Volume Priority Flow Control				
Code	CF Port	EF Port	P Port	T Port
10	SAE-8	SAE-10	SAE-10	3/8" NPTF
50	3/8" NPTF	1/2" NPTF	1/2" NPTF	3/8" NPTF
75	1/2" NPTF	3/4" NPTF	3/4" NPTF	3/8" NPTF


Code	Description
1	3.75 LPM (1.0 GPM)
1.5	5.63 LPM (1.5 GPM)
2	7.5 LPM (2 GPM)
3	11.25 LPM (3 GPM)
4	15 LPM (4 GPM)
5	18.75 LPM (5 GPM)

Service Parts

SAE - 10 plug	10HP50V-S
SAE - 4 plug	4HP50V-S
Spool Seal	3910N-7

Note: The body and the internal parts are non-service items.

Inch equivalents for millimeter dimensions are shown in (**)

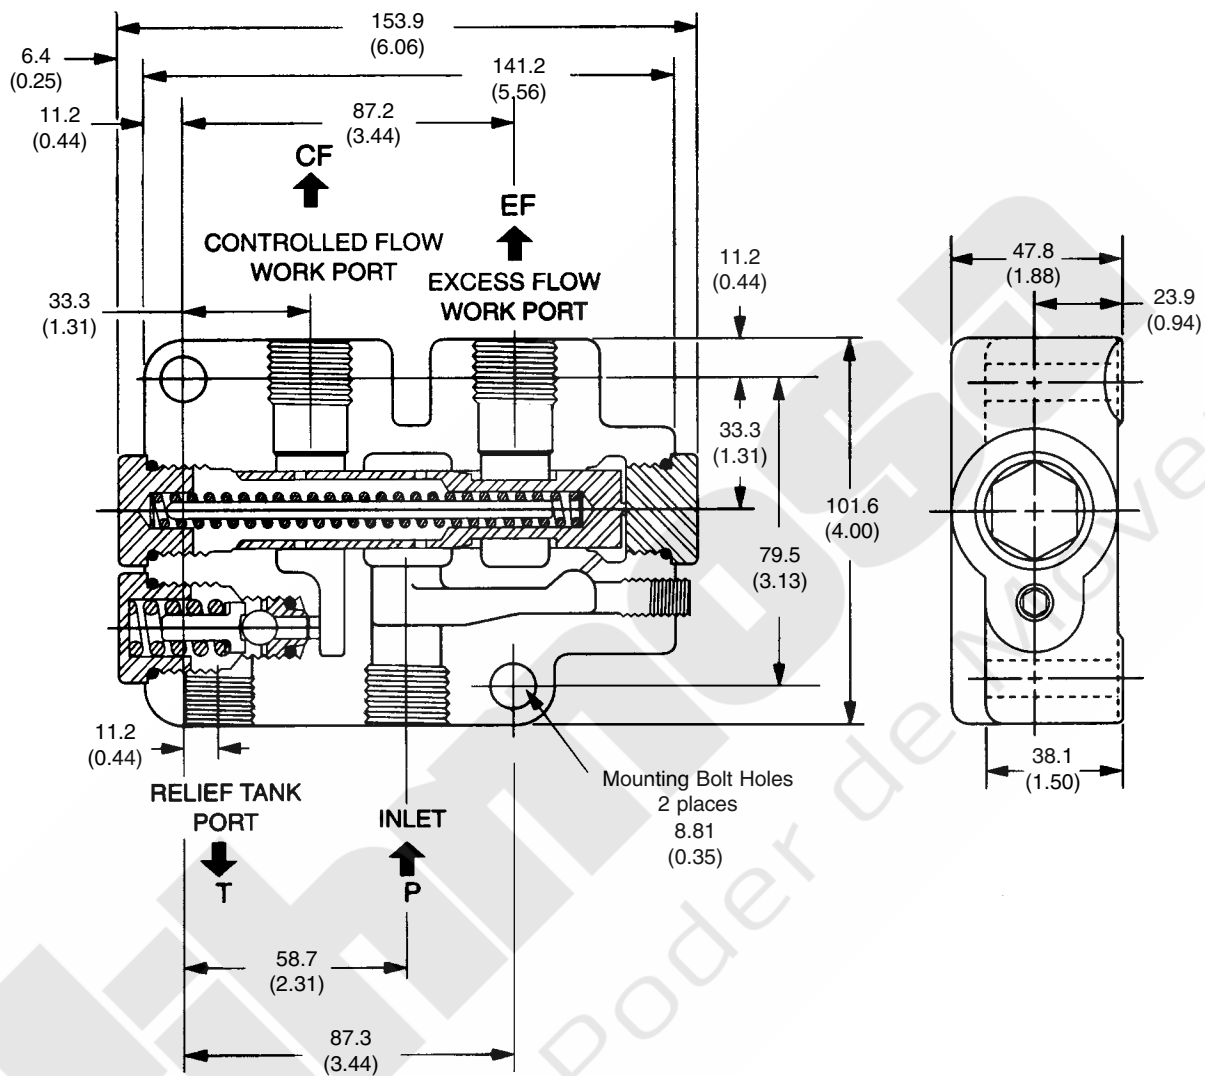

General Description

Series CFDA flow controls offer a dependable means of obtaining flow adjustment up to 56.25 LPM (15 GPM). It provides easy manual control where frequent flow change is required. Pressure compensation provides a smooth, constant output flow regardless of pressure changes at the controlled flow port.

Operation

Flow enters the valve through the inlet. Rotating the adjusting knob varies the flow from the controlled flow port. When controlled flow demand is satisfied, the balance of the inlet flow passes through the excess flow port and returns to the tank. The excess flow port is not a work port and must not be pressurized.


Flow through the controlled port can be reversed, but is not pressure compensated.

Features

- Adjustable flow rate
- Cross drilled spool provides extremely accurate metering
- Hardened metering spool
- High tensile, cast iron body

Specifications

Input Flow	56.25 LPM (15 GPM)
Operating Pressure SAE Ports NPTF Ports	177 Bar (2500 PSI) 138 Bar (2000 PSI)
Flow Adjustment Range	6 turns of knob from minimum to maximum flow
Operating Temperature Range (Ambient)	Nitrile Seals: -40°C to +93°C (-40°F to +200°F)
Material	Body – High strength cast iron
Filtration	ISO Code 16/13 SAE Class 4 or better
Mounting Position	In-line; no restrictions

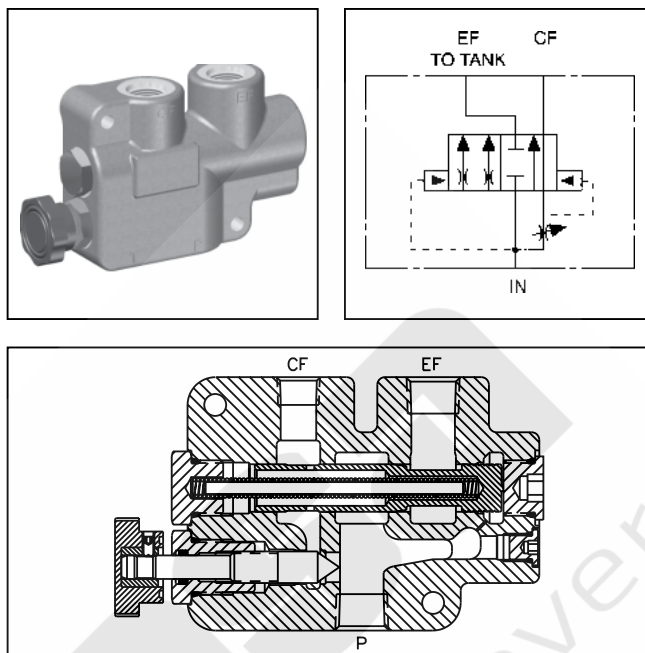

Ordering Information

CFDA

Pressure
Compensated
Bypass Type
Flow Control



Port Size



Code	Description
10	SAE-10 (3/4" - 16 UNF)
50	1/2" - 14 NPT
75	3/4" - 14 NPT

Service Parts

Knob	03236001
Seal Knob Cap	3910N-7

Note: The body and the internal parts are non-service items.

Inch equivalents for millimeter dimensions are shown in (**)

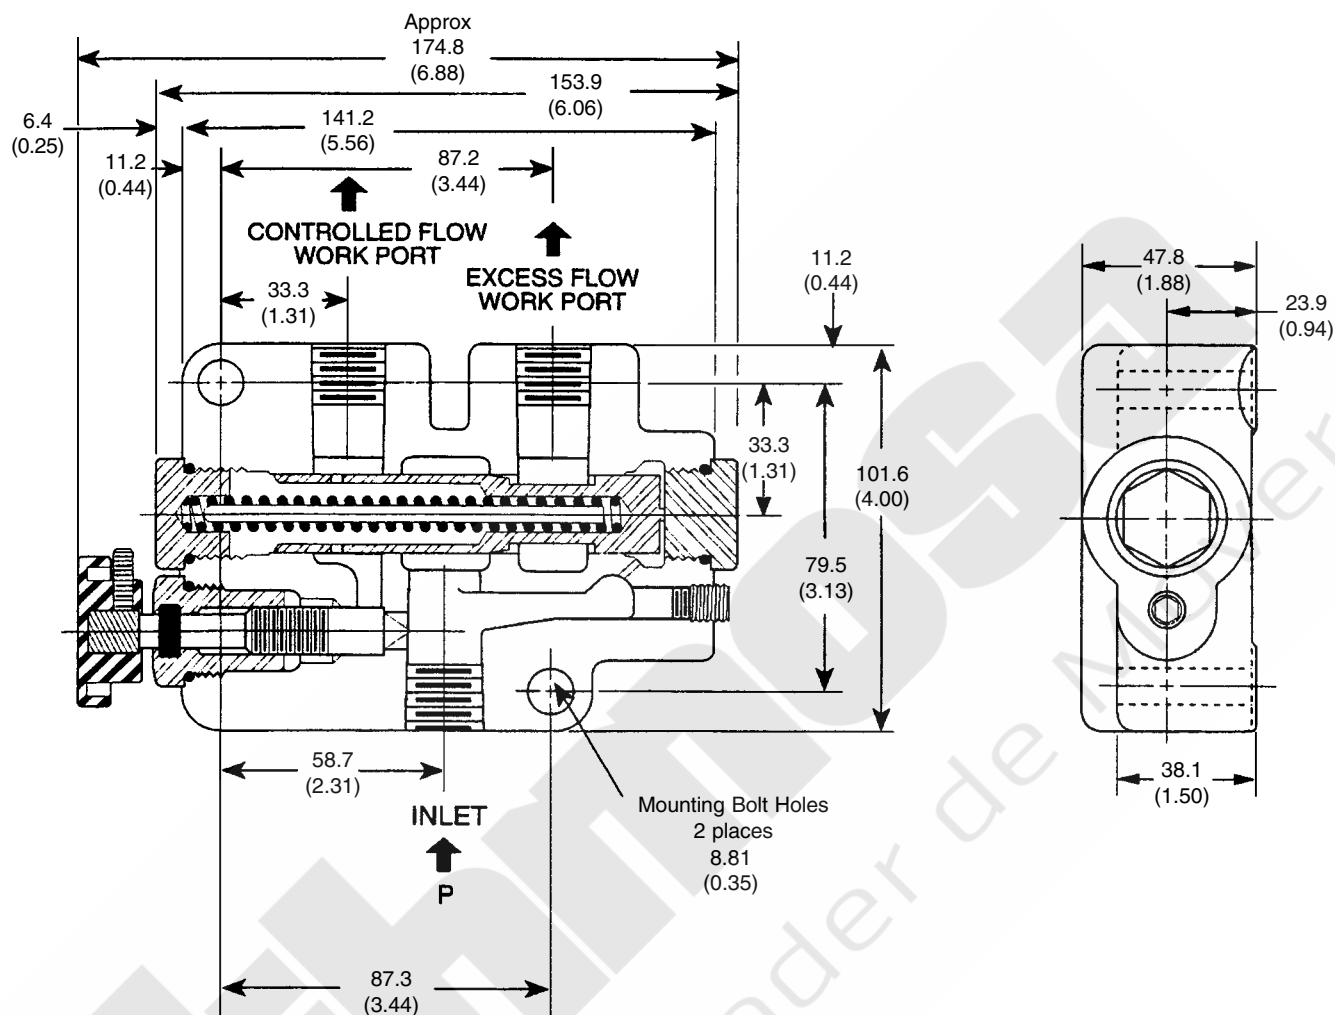

General Description




Series DC25 accessory valves are priority flow controls. They are designed for applications where two separate hydraulic circuits are to be served from a single pump. The valve provides a priority flow to the primary (CF) circuit, and an excess flow to a secondary (EF) circuit or to the tank. When the excess flow port is plugged, the valve will function as a restrictive-type, pressure compensated flow control.

Features

- Excess flow can be used in a secondary circuit
- Hardened metering spool

Specifications

Input Flow	112.5 LPM (30 GPM)
Adjustable Controlled Flow Range	3.75-97.5 LPM (1-26 GPM)
Accuracy of Adjustment	± 10% @ 11.25 LPM (3 GPM) or greater
Operating Pressure	SAE Ports 210 Bar (3000 PSI)
	NPTF Ports 138 Bar (2000 PSI)
Minimum Operating Pressure	4.8 Bar (70 PSI)
Operating Temperature Range (Ambient)	Nitrile Seals: -40°C to +93°C (-40°F to +200°F)
Material	Body – High strength cast iron Spool – Hardened and ground steel
Filtration	ISO Code 16/13, SAE Class 4 or better
Mounting Position	In-line; no restrictions
Knob Rotation	360° full adjustment

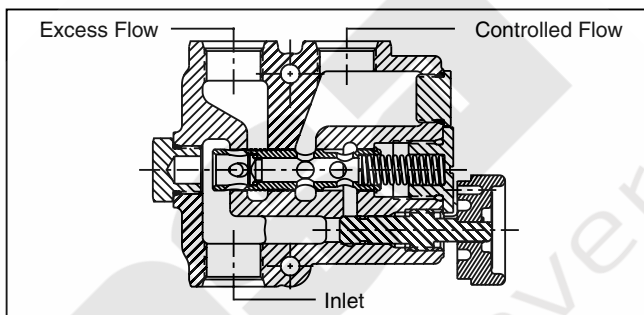

Operation

Flow enters the inlet port and passes through an adjustable control orifice. The control orifice can be varied externally in the adjustable version.

Flow through the adjustable control orifice causes a pressure drop which is sensed across the compensator spool. Excess flow across the compensator spool increases the pressure drop across it. This changes the pressure drop and shifts the spool allowing it to maintain priority flow and diverting more flow to the excess flow port. When pressure in the excess flow port exceeds the pressure in the controlled flow port, the spool will also shift to maintain the required priority flow to the primary circuit.

If the controlled flow port is blocked, the compensator spool will return to the closed position, allowing no flow through the valve.

DC25

Priority Flow
Control

A

Flow Control
Adjustment

Knob
Adjustment

Port Size

Code	Description
10	SAE-10
12	SAE-12
50	1/2" NPTF
75	3/4" NPTF

Service Parts

Relief Valve Kits

34 to 86 Bar (500 to 1250 PSI)
 121 to 138 Bar (1750 to 2000 PSI)
 138 to 179 Bar (2000 to 2600 PSI)

179 to 207 Bar (2600 to 3000 PSI)

20089001
 20089004
 20089005
 (SAE ported
valves only)
 20089006
 (SAE ported
valves only)

Knob Kit




00712017

Note: The body and the spool are not service items.

Dimensions

Inch equivalents for millimeter dimensions are shown in (**)

#12 SAE Ports
 1-1/16 UN-2B Thread
 3 Places

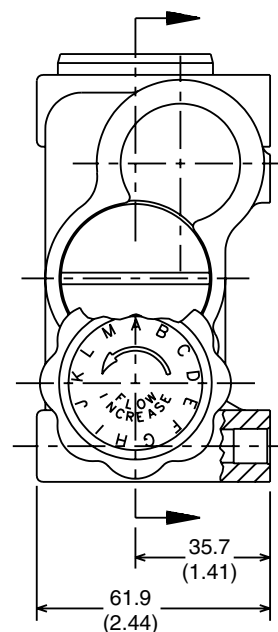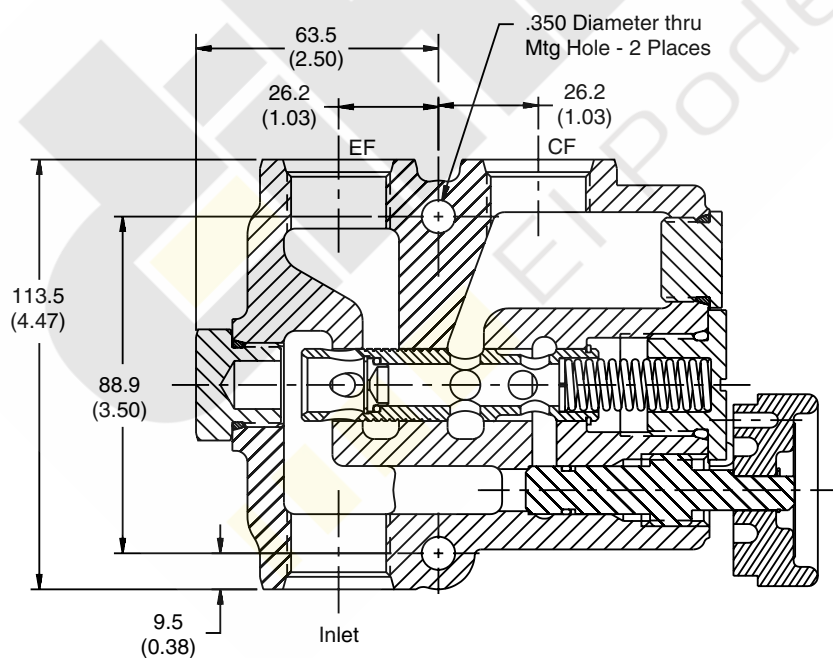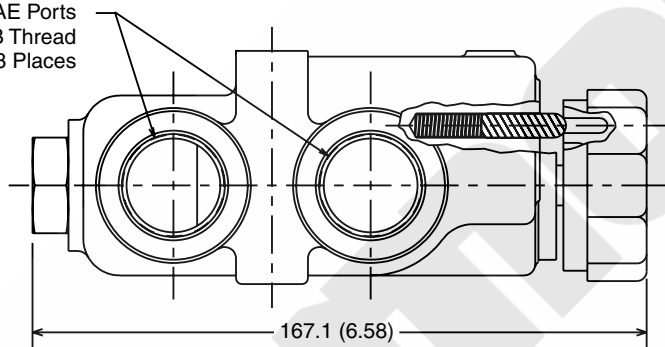

General Description

Series DS12 and DS75 accessory valves are two-position, double selector valves. They are designed for directing flow from one single hydraulic circuit to two separate hydraulic lines. This permits operation of two, double-acting cylinders with:

- one four-way control valve, or
- four single-acting cylinders with two three-way control valves.

The valve should be operated (shifted) prior to applying pressure to it. When the spool begins to move, all ports are momentarily connected.

Operation



In the normal mode, pump flow can enter the valve through either A or B port. The other port then becomes the return port. Port A is connected to Port D; Port B is connected to Port C. When the lever is pushed in, Port A is connected to Port E; Port B is connected to Port F.

Features


- Chrome plated spool
- High-tensile cast iron body

Specifications

Input Flow	93.75 LPM (25 GPM)
Operating Pressure SAE Ports NPTF Ports	207 Bar (3000 PSI) 138 Bar (2000 PSI)
Operating Temperature Range (Ambient)	Nitrile Seals: -40°C to +93°C (-40°F to +200°F)
Material	Body – High strength cast iron Spool – Hardened and ground steel
Filtration	ISO Code 16/13 SAE Class 4 or better
Mounting Position	In-line; no restrictions

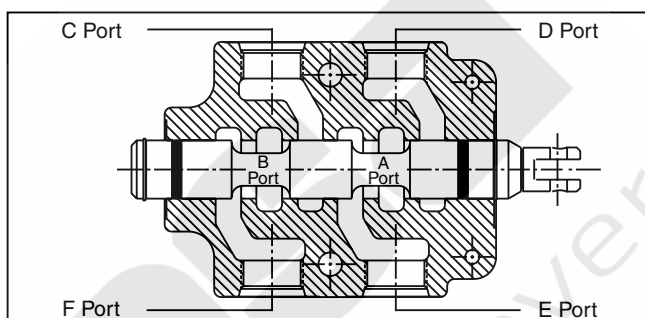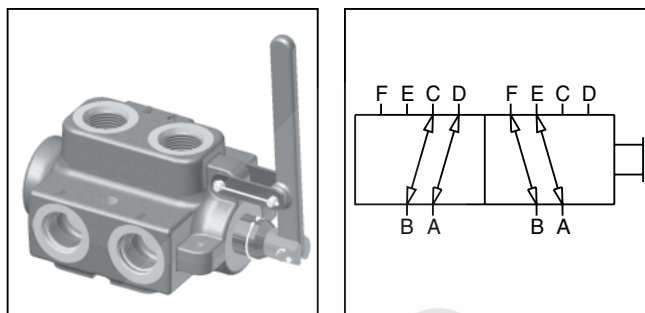

Ordering Information

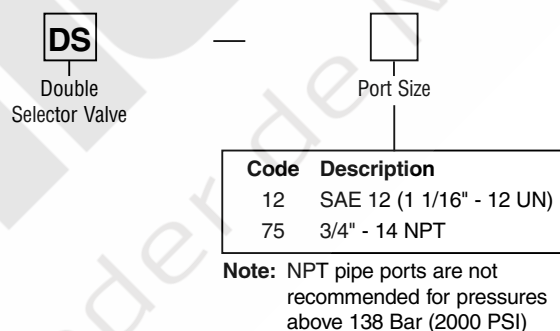



Service Parts

Handle Kit	06656001
Kit – Spool Seals and Retaining Rings	06492001
Clevis and Lock Washer Kit	08650235

Note: The body and the spool are not service items.

Dimensions**Mobile Accessory Valves****Series DS**

Inch equivalents for millimeter dimensions are shown in (**)

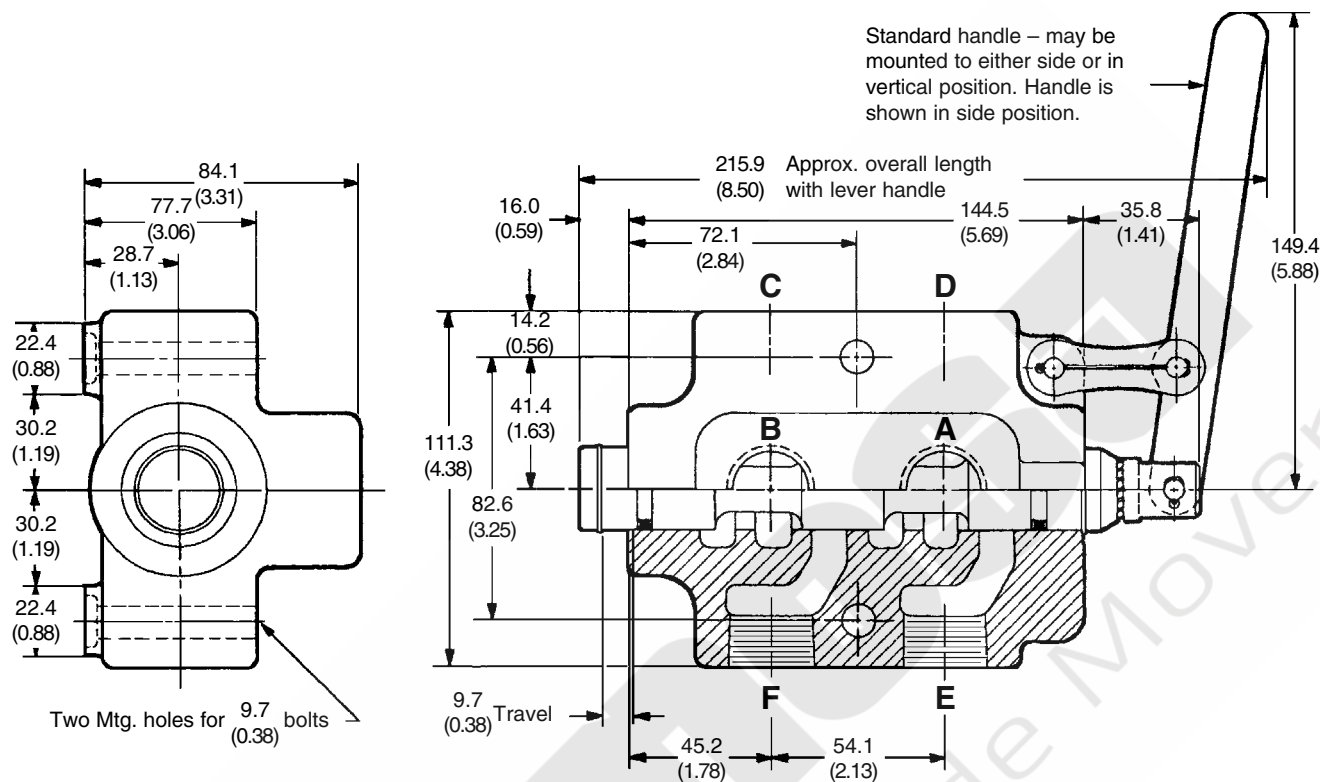

General Description

Series DWV relief valves are differential area, cross-over reliefs (cushion valves). They are designed to eliminate or minimize shock, surge, or overload conditions on hydraulic equipment. They may be used with cylinders of equal displacement, or with motors to provide crossover relief when the motors are stopped.

Operation




The DWV relief valve relieves oil from one side of the actuator to tank, therefore reducing shock and preventing overload. It also eliminates cavitation and the need for a separate tank connection. The valve should be installed as close to the actuator as possible for best results.

Features

- Compact, low profile design
- Fast response to cushion shocks and protect actuators
- Cartridge style relief valves
- High tensile, compacted graphite body

Specifications

Input Flow	93.75 LPM (25 GPM)
Operating Pressure SAE Ports NPTF Ports	210 Bar (3000 PSI) 138 Bar (2000 PSI)
Operating Temperature Range (Ambient)	Nitrile Seals: -40°C to +93°C (-40°F to +200°F)
Material	Body – High strength cast iron Poppet – Hardened and ground steel
Filtration	ISO Code 16/13 SAE Class 4 or better
Mounting Position	In-line; no restrictions

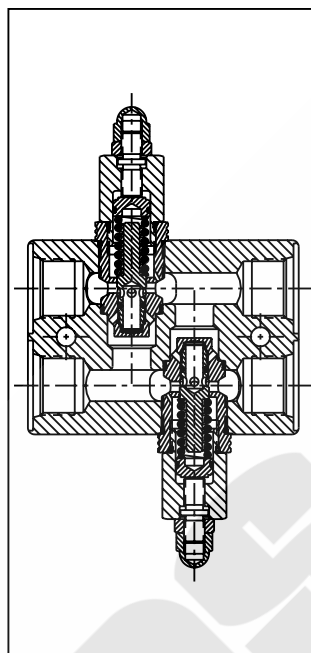

Ordering Information


DWV	Port Size	Adjustment Option	Pressure Range
Differential Area Crossover Relief			
Code	Description	Code	Description
8	SAE-8 (3/4" - 16 UNF)	Omit	Shim Adjustable
10	SAE-10 (7/8" - 14 UNF)	A	Screw Adjustable
12	SAE-12 (1 1/16" - 12 UNF)		
50	1/2" - 14 NPT		
75	3/4" - 14 NPT		
Code	Setting	Range	
1250	89 Bar (1250 PSI)	35 - 89 Bar (500 - 1250 PSI)	
2000	142 Bar (2000 PSI)	89 - 142 Bar (1250 - 2000 PSI)	
2500	177 Bar (2500 PSI)	142 - 177 Bar (2000 - 2500 PSI)	
3000	210 Bar (3000 PSI)	142 - 210 Bar (2000 - 3000 PSI)	

Service Parts



Relief Valve Cartridges	
35 - 89 Bar (500 - 1250 PSI)	WHA-1250
89 - 142 Bar (1250 - 2000 PSI)	WHA-2000
142 - 177 Bar (2000 - 2500 PSI)	WHA-2500
177 - 210 Bar (2500 - 3000 PSI)	WHA-3000
O-Ring Seal Kit	00712359
Relief Adjustments	
Screw Adjustment – 1/4 turn = 200 PSI ±10%	
Shim Adjustment – 100 PSI	00462001
150 - 250 PSI	00459001
250 - 450 PSI	00458001

Note: The body and the internal parts of the relief valve (including the spring) are non-service items.

Low End – 34 to 207 Bar (500 to 3000 PSI)

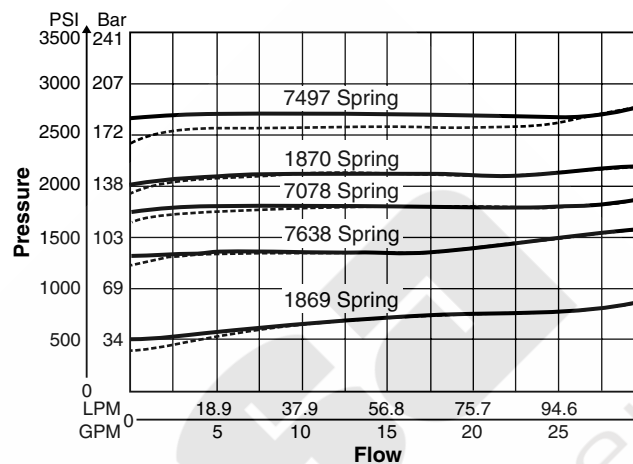

Inch equivalents for millimeter dimensions are shown in (**)

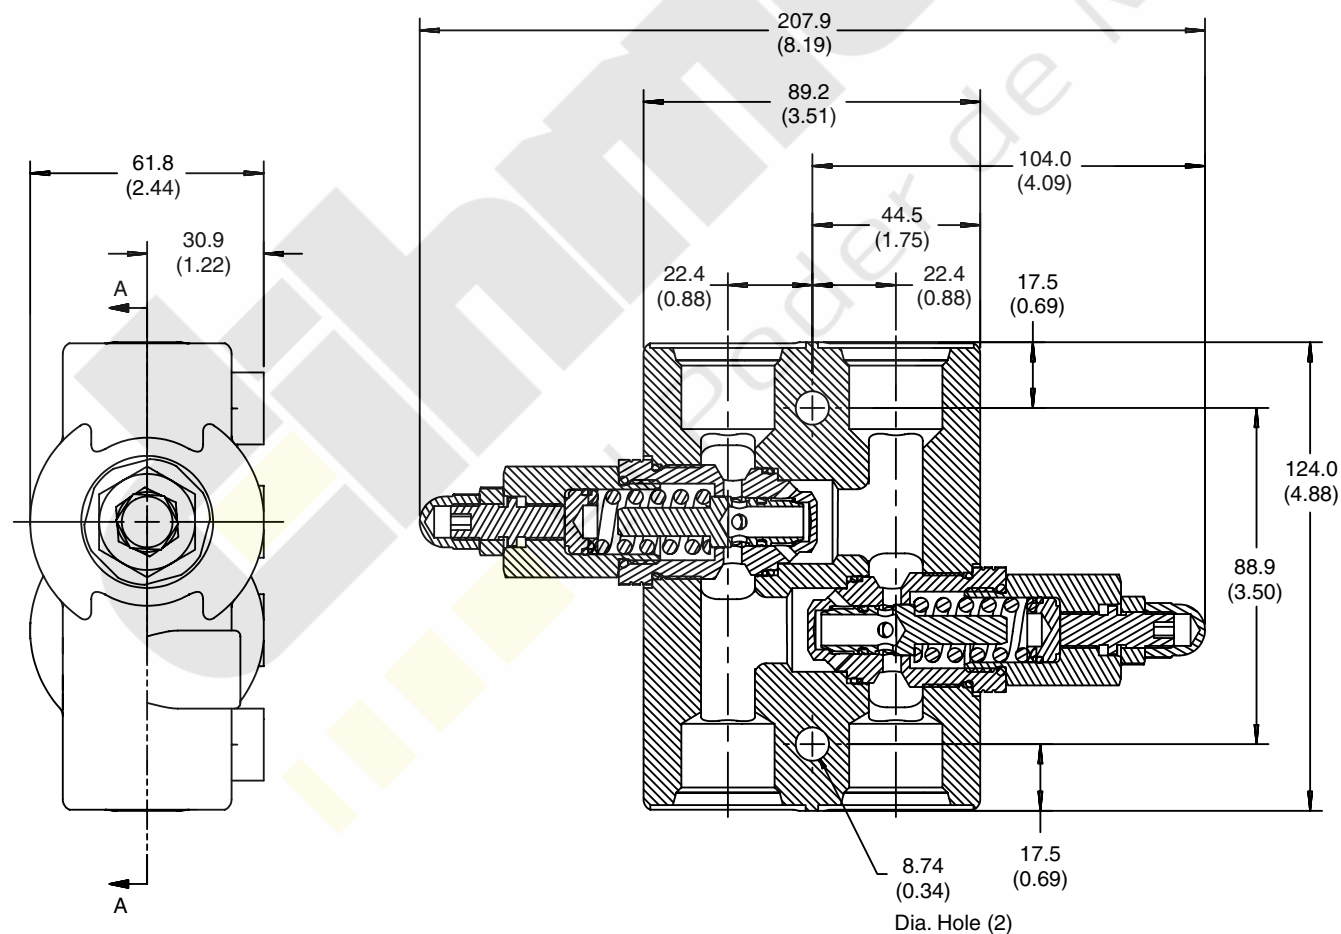

General Description

Series DXV relief valves are direct acting, crossover reliefs (cushion valves). They are designed to eliminate or minimize shock, surge, or overload conditions on hydraulic equipment. They may be used with cylinders of equal displacement, or with motors to provide crossover relief when the motors are stopped.

Operation



The DXV relief valve relieves oil from one side of the actuator to tank, therefore reducing shock and preventing overload. It also eliminates cavitation and the need for a separate tank connection. The valve should be installed as close to the actuator as possible for best results.

Features

- Compact, low profile design
- Hardened seats for long life
- Fast response to cushion shocks and protect actuators
- High tensile, compacted graphite body

Specifications

Input Flow	37.5 LPM (10 GPM)
Operating Pressure SAE Ports NPTF Ports	210 Bar (3000 PSI) 138 Bar (2000 PSI)
Operating Temperature Range (Ambient)	Nitrile Seals: -40°C to +93°C (-40°F to +200°F)
Material	Body – High strength cast iron Poppet – Hardened and ground steel
Filtration	ISO Code 16/13 SAE Class 4 or better
Mounting Position	In-line; no restrictions

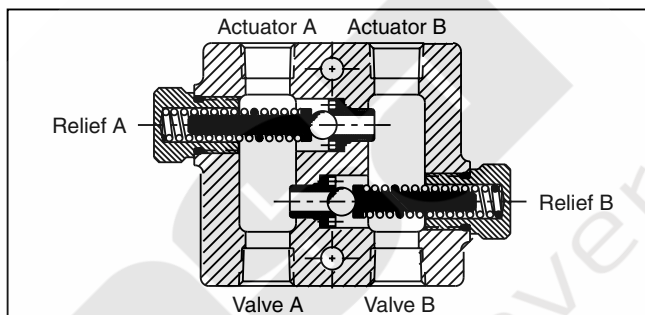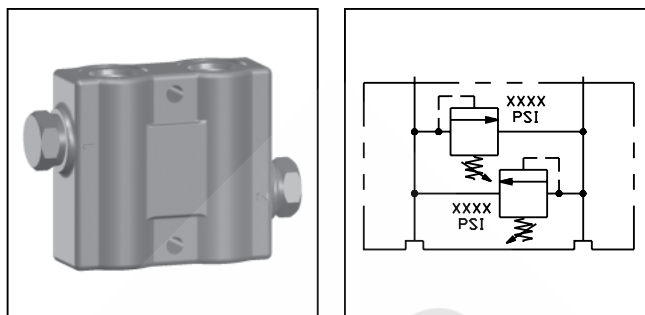

Ordering Information

DXV		Port Size	Adjustment Option	Pressure Range
Direct Acting Crossover Relief				
Code	Description	Code Description		
8	SAE-8 (3/4" - 16 UNF)	Omit	Shim	Adjustable
10	SAE-10 (7/8" - 14 UNF)			
38	3/8" - 18 NPT			
50	1/2" - 14 NPT			
75	3/4" - 14 NPT			
Code	Setting	Range		
400	28 Bar (400 PSI)	3.5 - 28 Bar	(50 - 400 PSI)	
750	53 Bar (750 PSI)	28 - 53 Bar	(400 - 750 PSI)	
900	64 Bar (900 PSI)	53 - 64 Bar	(750 - 900 PSI)	
1300	92 Bar (1300 PSI)	64 - 92 Bar	(900 - 1300 PSI)	
1450	103 Bar (1450 PSI)	91 - 103 Bar	(1300 - 1450 PSI)	
1800	128 Bar (1800 PSI)	103 - 128 Bar	(1450 - 1800 PSI)	
2000	142 Bar (2000 PSI)	128 - 142 Bar	(1800 - 2000 PSI)	
3000*	210 Bar (3000 PSI)	142 - 210 Bar	(2000 - 3000 PSI)	


* SAE ported bodies only.

Service Parts

Upper Relief Valve Seal	2115N-7
Relief Adjustments	
Shim Adjustment	
100 PSI	00462001
150 - 250 PSI	00459001
250 - 450 PSI	00458001

Note: The body and the internal parts of the relief valve (including the spring) are non-service items.

Inch equivalents for millimeter dimensions are shown in (**)

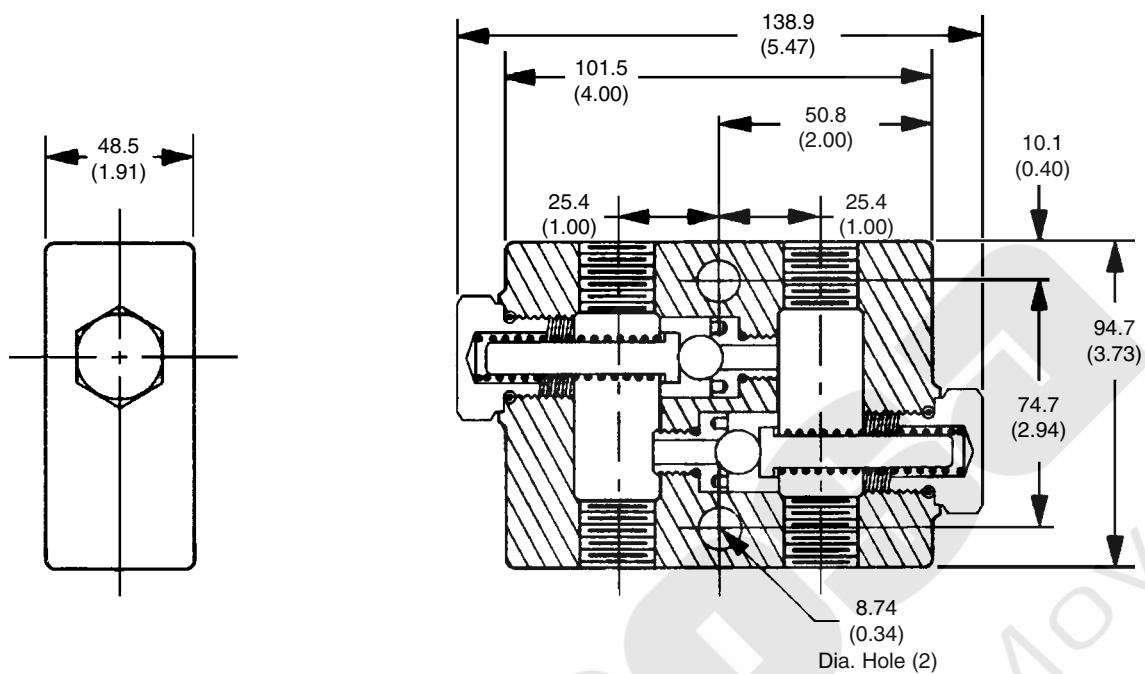

General Description

Series HP50 pilot pressure valves are designed to provide a separately mounted, pilot pressure system for solenoid and hydraulic remote-controlled, directional control valves.

The pilot pressure valve is installed in the hydraulic system between the pump and the directional control valve.

This valve can be used for other applications where a pilot pressure is required. Possible applications are remote-controlled, variable displacement pumps or motors and differential locks.





The valve consists of a mechanical sequence valve and a pressure reducing cartridge. The pilot operated sequence valve creates a stand-by pressure greater than the pressure reducing cartridge. The pressure reducing cartridge limits the maximum pressure in the pilot circuit.

Features

- Eliminates separate pilot pump and relief valve for a pilot system
- Simplifies plumbing for a pilot system
- Easily installed into an existing hydraulic system
- Optional main system relief valve available
- Solenoid kits available

Operation

The mechanical pressure build up valve can be used in open center systems where the pump is not in stand-by operation for long periods of time. Pilot pressure is maintained at all times.

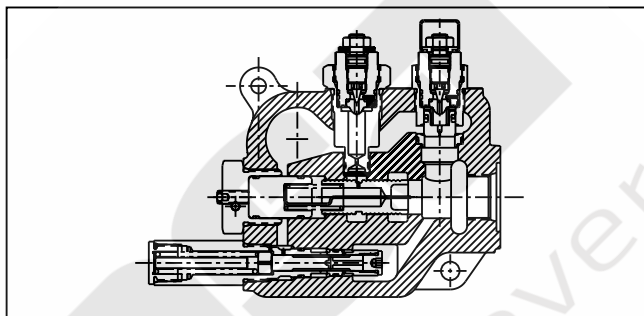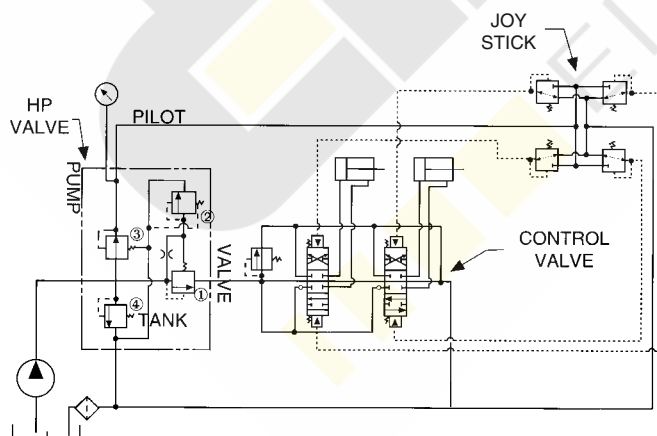

Specifications

Input Flow	187.5 LPM (50 GPM)
Pilot Flow	18.75 LPM (5 GPM)
Operating Pressure Inlet Tank	240 Bar (3500 PSI) 24 Bar (350 PSI)
Operating Temperature Range (Ambient)	Nitrile Seals: -40°C to +93°C (-40°F to +200°F)
Material	Body – High strength cast iron
Filtration	ISO Code 16/13, SAE Class 4 or better
Mounting Position	In-line; no restrictions


Understanding the HP pilot pressure valve

Many open center systems have very little pressure drop through the directional valve when in the neutral position. These systems do not provide enough pressure for pilot operation. To create pilot pressure, use the HP valve.

The HP valve has four basic component parts:

1. Sequence valve slave
2. Sequence valve pilot
3. Reducing valve
4. Relief valve

The sequence slave (part #1) and the sequence pilot (part #2) create the back pressure that is used for pilot operation. The reducing valve (part #3) protects the pilot system from high pressure. The relief valve (part #4) protects the pump. Note that the relief valve is located on the pump side of the sequence valve.

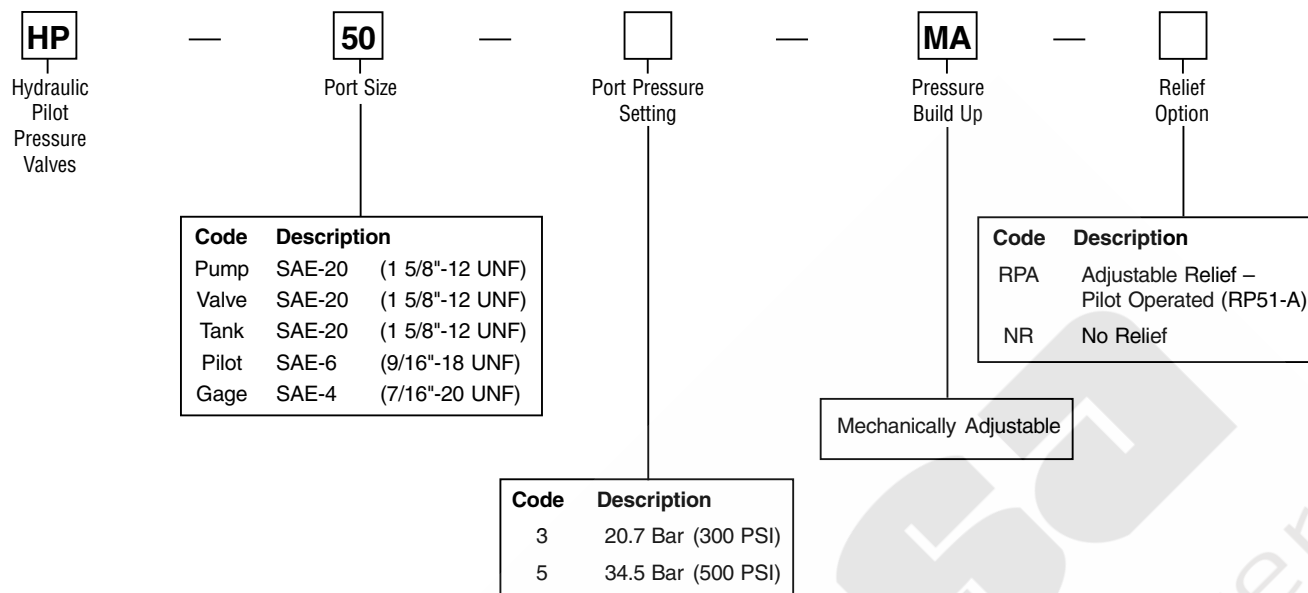



Service Parts

20.7 Bar (300 PSI) Pilot Pressure Reducing Valve	11416001
34.5 Bar (500 PSI) Pilot Pressure Reducing Valve	11416002
NR - no relief plug	04142003
Relief Valve	RP51-A
Pressure Build Up Valve	20275001
Upper Seal - Pressure Build Up Valve	3914V-9
Lower Seal - Pressure Build Up Valve	2019N-7
Lower Back Up Ring - Pressure Build Up Valve	407480
12 VDC Solenoid Unloader Kit	10722001
24 VDC Solenoid Unloader Kit	00711871
Relief Valve Seal Kit	00712223

Note: The body and the internal parts are non-service items.



Dimensions

Inch equivalents for millimeter dimensions are shown in (**)

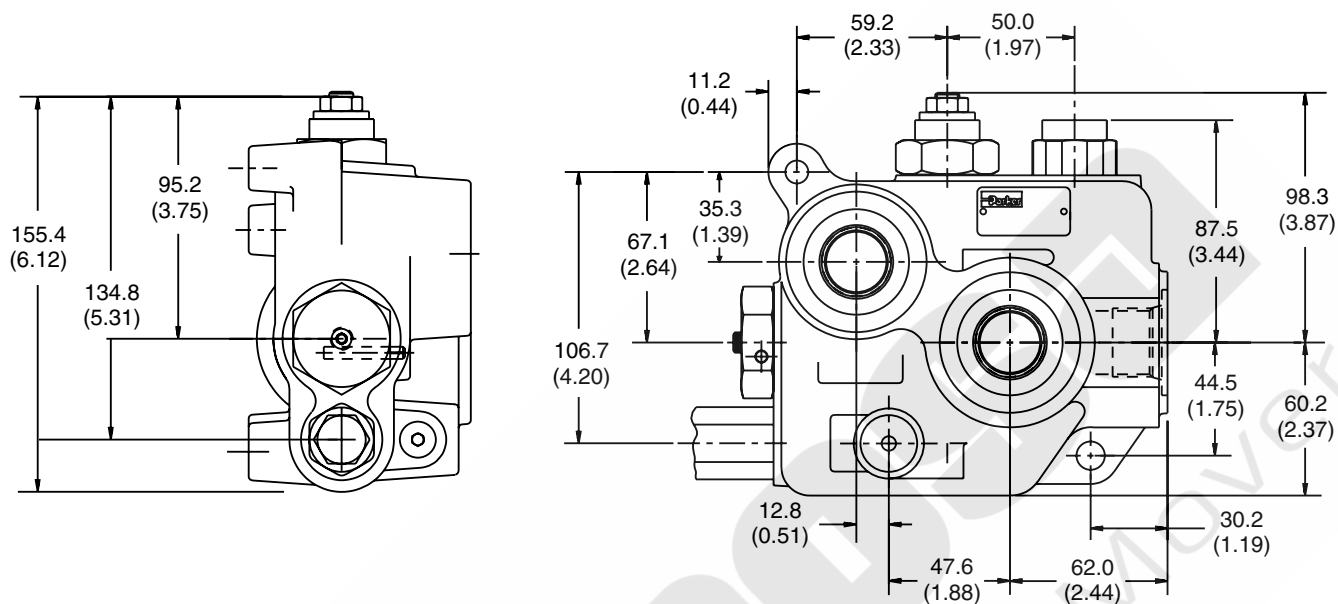

Performance Curve

Pilot Performance (Nominal)

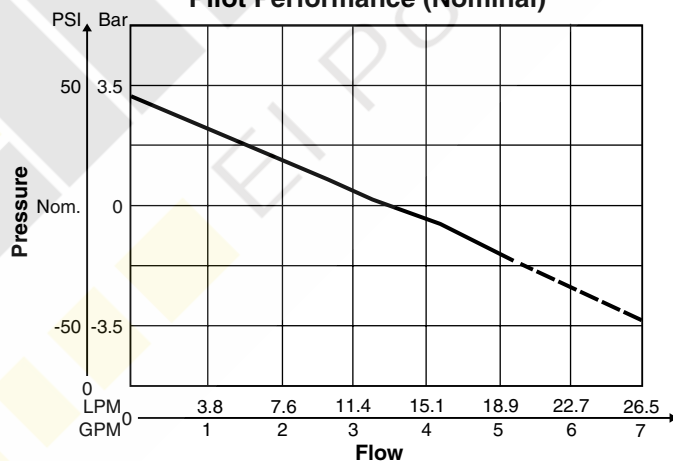

General Description

Series LO valves are single and double, pilot operated check valves. They are designed to lock a cylinder or part of a circuit without leakage, while a control valve is in a neutral position. Lock valves function as check valves, allowing flow to a cylinder and blocking reverse flow until pilot pressure is applied to unlock the circuit. This valve works best when used with a directional control valve that vents the work ports to tank when it is in a neutral mode.

Operation



Free flow is permitted from the valve port to the work port through the check valve. This check prevents reverse flow in the absence of pilot pressure. When adequate pilot pressure is applied at the pilot port, the pilot piston unseats the check poppet permitting free flow.

Features


- Hardened seats
- Ball/Spring check valves
- High tensile, cast iron body

Specifications

Input Flow	93.75 LPM (25 GPM)
Operating Pressure SAE Ports NPTF Ports	210 Bar (3000 PSI) 138 Bar (2000 PSI)
Pilot Ratio	3.36 to 1
Operating Temperature Range (Ambient)	Nitrile Seals: -40°C to +93°C (-40°F to +200°F)
Material	Body – High strength cast iron
Filtration	ISO Code 16/13 SAE Class 4 or better
Mounting Position	In-line; no restrictions

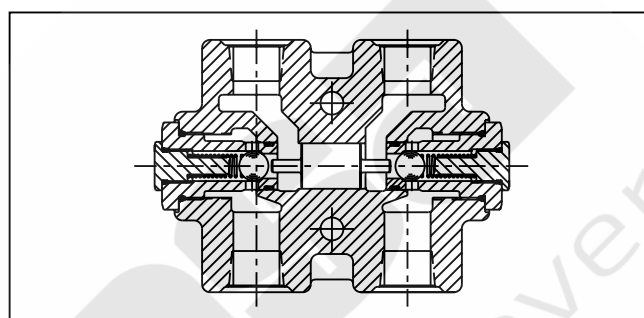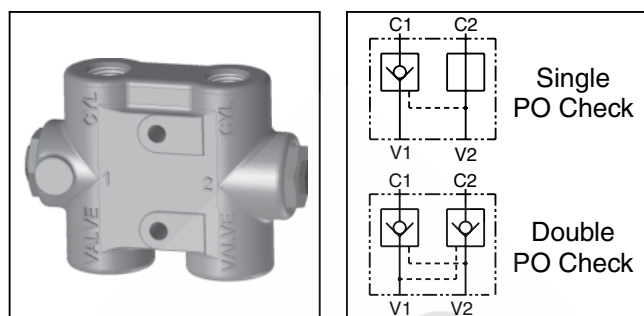

Ordering Information

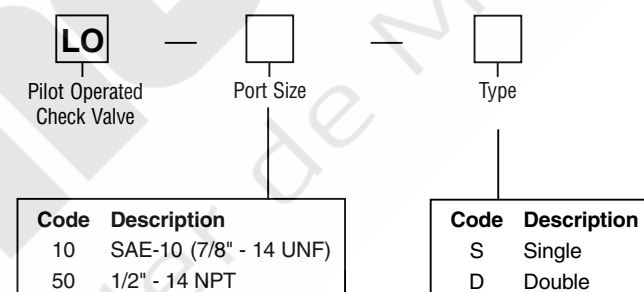


Service Parts

Check Valve	07350001
-------------	----------

Note: The body and the internal parts are non-service items.

Inch equivalents for millimeter dimensions are shown in (**)

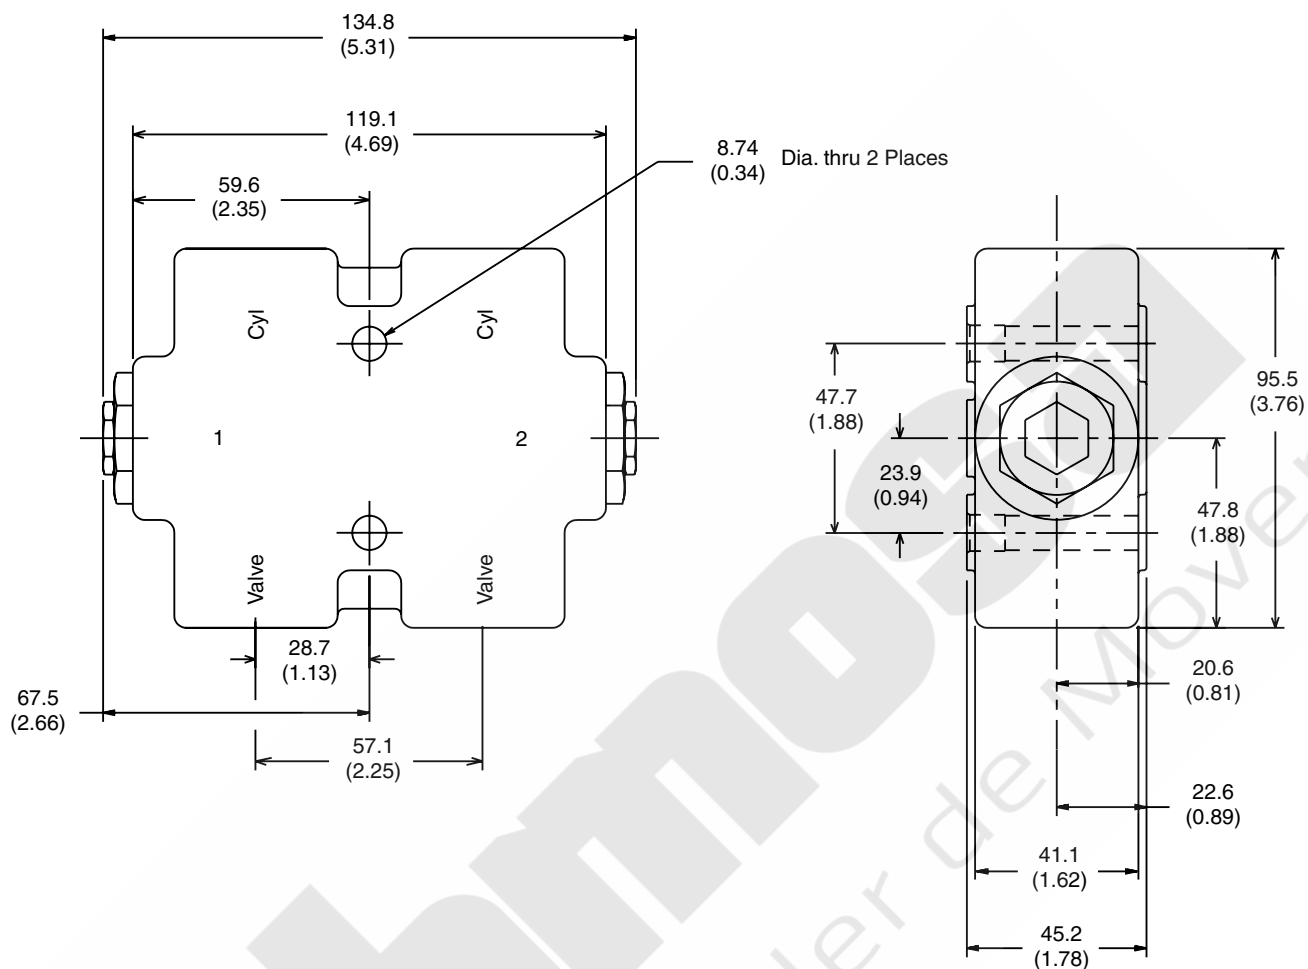

General Description

Series LOA valves are single and double, pilot operated check valves. They are designed to lock a cylinder or part of a circuit without leakage, while a control valve is in a neutral position. Lock valves function as check valves, allowing flow to a cylinder and blocking reverse flow until pilot pressure is applied to unlock the circuit. This valve works best when used with a directional control valve that vents the work ports to tank when it is in a neutral mode.

Operation



Free flow is permitted from the valve port to the work port through the check valve. This check prevents reverse flow in the absence of pilot pressure. When adequate pilot pressure is applied at the pilot port, the pilot piston unseats the check poppet permitting free flow.

Features


- Hardened seats
- Ball/Spring check valves
- High tensile, cast iron body

Specifications

Input Flow	30 LPM (8 GPM)
Operating Pressure SAE Ports NPTF Ports	210 Bar (3000 PSI) 138 Bar (2000 PSI)
Pilot Ratio	3.36 to 1
Operating Temperature Range (Ambient)	Nitrile Seals: -40°C to +93°C (-40°F to +200°F)
Material	Body – High strength cast iron
Filtration	ISO Code 16/13 SAE Class 4 or better
Mounting Position	In-line; no restrictions

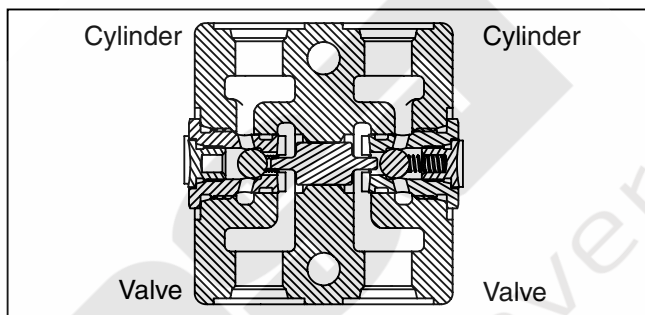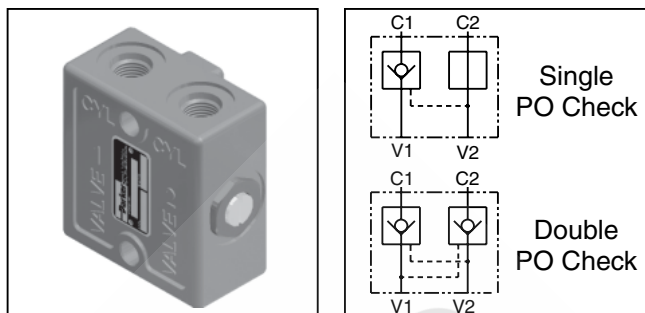

Ordering Information

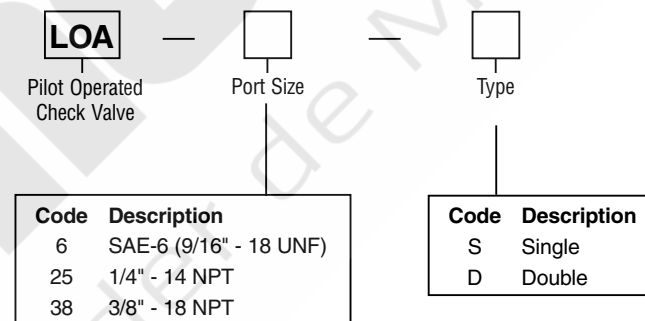


Service Parts

Check Valve	04169001
-------------	----------

Note: The body and the internal parts are non-service items.

Inch equivalents for millimeter dimensions are shown in (**)

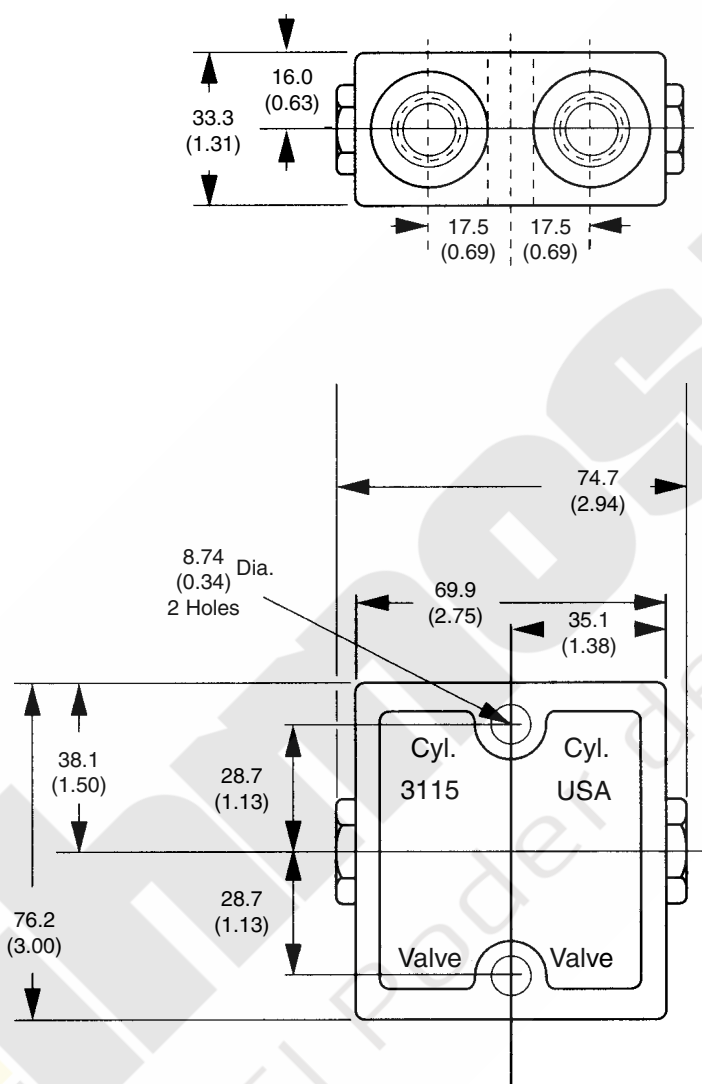

General Description

Series PD and PDC accessory valves are pressure compensated flow dividers. They are designed for applications where two separate hydraulic circuits are to be served from a single pump. The valve splits the flow in three ratios between the two hydraulic lines. Flow through the series PD flow divider cannot be reversed. Flow through the PDC flow divider can be combined in the reverse direction and synchronized in both directions.

Series PD and PDC flow dividers will divide the inlet flow to $\pm 10\%$ of the specified outlet flow when used within recommended capacities. In addition, many actuators can displace fluid different from the ratio of the divider. This can cause two actuators to either lock up or become out of synch. A means of rephasing the actuators is recommended.

Operation

As flow enters the inlet port of the PD version, it will pass through the control orifices in the interconnected spools. The flow passing through the orifices in the spools creates a pressure drop which pulls the two spools away from each other. The flow then passes to the two-divider outlet ports.

When flow is to be combined in the PDC versions, it enters the valve through the two-divider outlet ports. The flow passes through the orifices in the spools creating a pressure drop which pushes the two spools towards each other. The combined flow then passes to the inlet port. The design of the PD spool does not allow flow to combine.

Features

- Pressure compensated
- Cross drilled spool provides accurate metering
- High tensile, cast iron body

Ordering Information

		
Flow Divider	Port Size	Ratio
Code Description	Code Description	Code Description
PD Flow Divider	10 SAE-10 (3/4" - 16 UNF)	50 50/50
PDC Flow Divider/Combiner	12 SAE 12 (1 1/16" - 12 UNF)	60 60/40
	50 1/2" - 14 NPT	70 70/30
	75 3/4" - 14 NPT	

NPT pipe ports are not recommended for pressures above 138 Bar (2000 PSI)



Note: The PDC is only available in a 50/50 ratio.

Service Parts

Spool Seal	3914N-9 (2 required)
------------	----------------------

Note: The body and the internal parts are non-service items.

PD-PDC.p65, dd

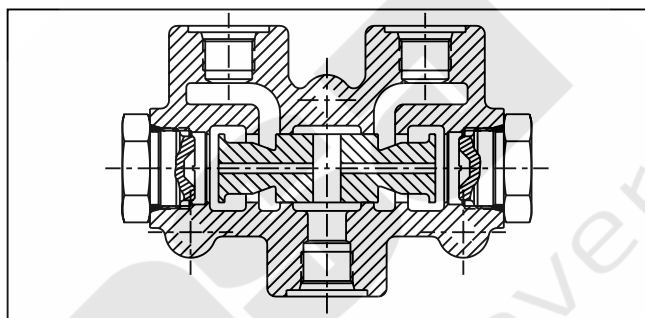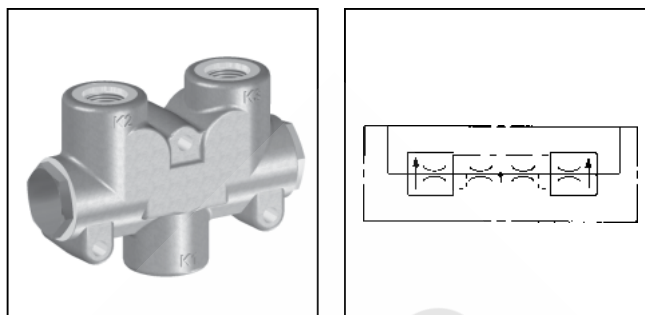


Specifications



Input Flow PD / PDC50 PD / PDC75 PD / PDC12	18.75 - 75 LPM (5 - 20 GPM) 75 - 131.25 LPM (20 - 35 GPM) 75 - 131.25 LPM (20 - 35 GPM)
Accuracy	$\pm 10\%$
Operating Pressure SAE Ports NPTF Ports	177 Bar (2500 PSI) 138 Bar (2000 PSI)
Operating Temperature Range (Ambient)	Nitrile Seals: -40°C to +93°C (-40°F to +200°F)
Material	Body – High strength cast iron Spool – Hardened and ground steel
Filtration	ISO Code 16/13 SAE Class 4 or better
Mounting Position	In-line; no restrictions

Performance Curves

In Divider Mode from Inlet to Joined Legs

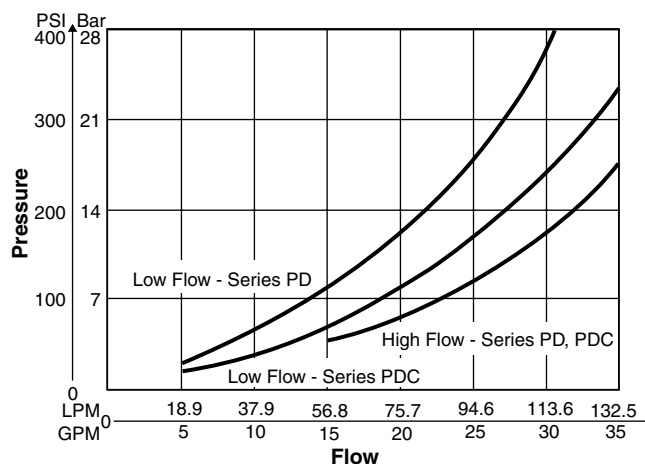

Inch equivalents for millimeter dimensions are shown in (**)

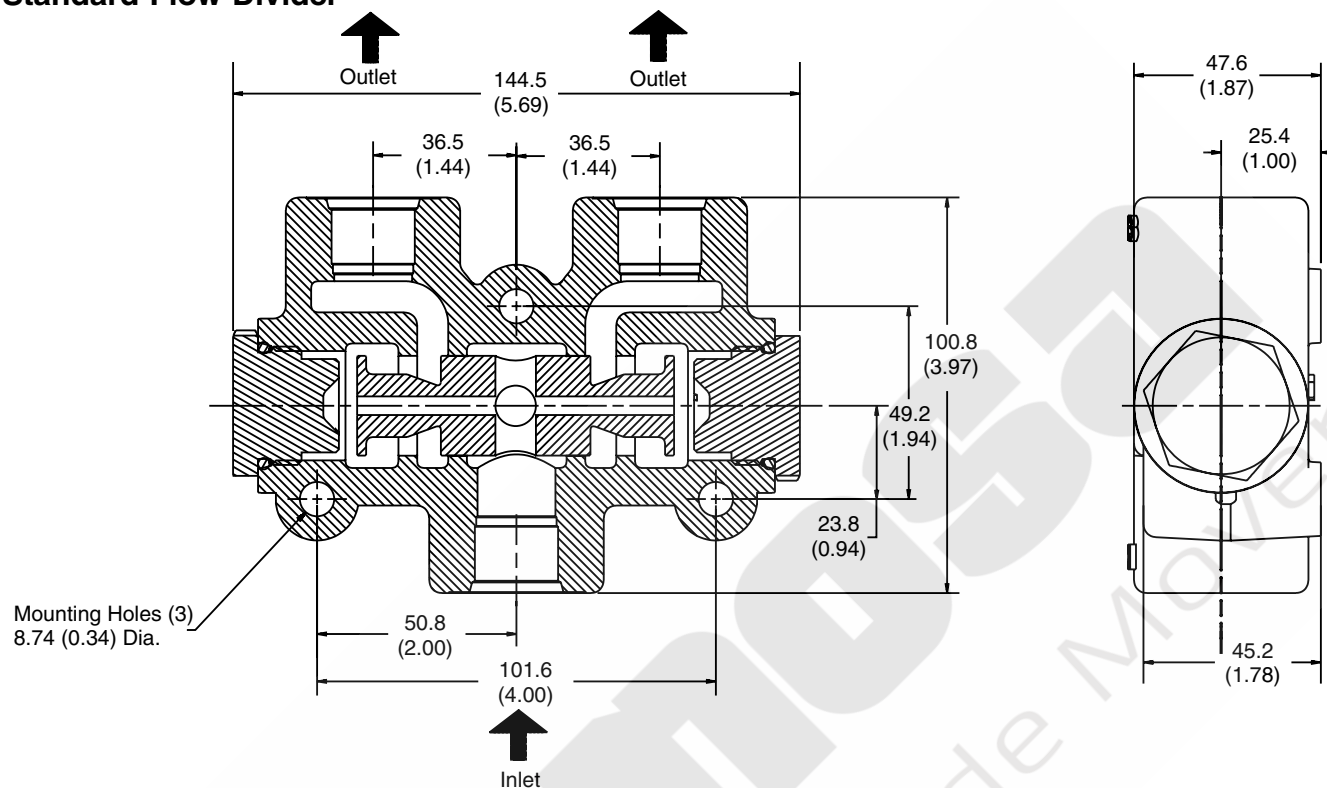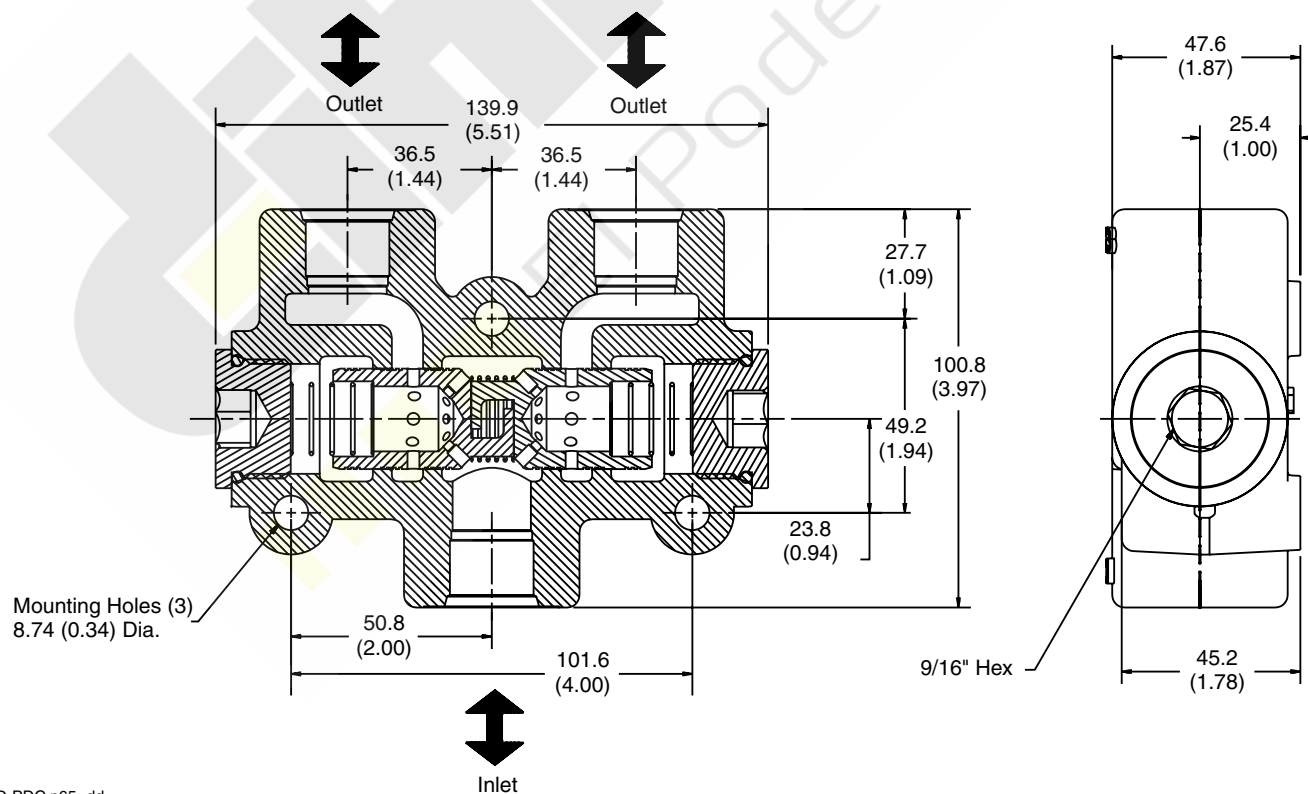**Series PD****Standard Flow Divider****Series PDC****Flow Divider / Combiner**

PD-PDC.p65, dd

General Description

Series RPJL accessory valves are relief valves used for limiting the maximum pressure which can be applied to the portion of the hydraulic circuit where it is connected.

Series RPJL relief valves are pilot operated, poppet-type relief valves. Their best application is a main system relief where smooth consistent performance is required.


Operation

The pilot section opens when inlet pressure on the RPJL relief valve exceeds the valve setting. This pilot flow creates a pressure imbalance across the main section causing the valve to open. The pilot section closes once the inlet pressure drops below the valve setting. This then re-seats the poppet in the main valve and closes it.

Features

- Compact, low profile design
- Hardened and ground poppet
- High tensile, compacted graphite body

Ordering Information

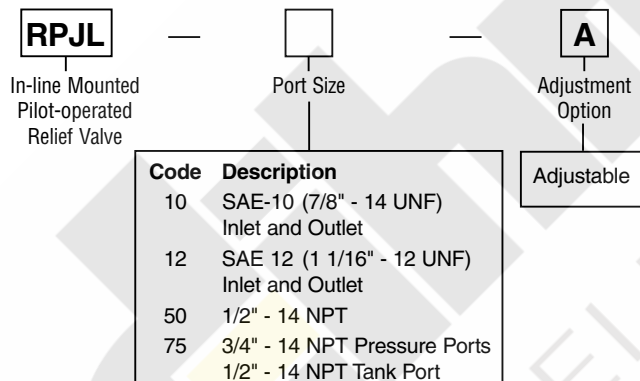

Note: NPT pipe ports are not recommended for pressures above 138 Bar (2000 PSI)


A right angle flow (former T option) is created by plugging one of the P ports.

Service Parts

Relief Valve	RP51-A-5000
O-Ring Seal Kit	00712223
Body Kit	
RPJL-10	K-WJL-10
RPJL-50	K-WJL-50
RPJL-75	K-WJL-75
Relief Adjustment	
1/4 turn = 200 PSI $\pm$ 10%	

Note: The internal parts of the relief valve (including the spring) are non-service items.

RPJL.p65, dd

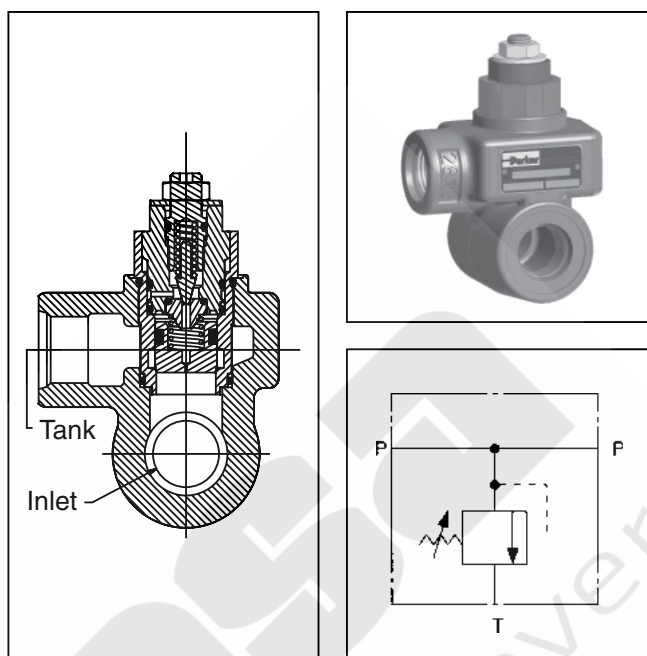


Specifications


Input Flow	93.75 LPM (25 GPM)
Operating Pressure SAE Ports NPTF Ports	350 Bar (5000 PSI) 138 Bar (2000 PSI)
Operating Temperature Range (Ambient)	Nitrile Seals: -40°C to +93°C (-40°F to +200°F)
Material	Body – High strength cast iron Spool – Hardened and ground steel
Filtration	ISO Code 16/13 SAE Class 4 or better
Mounting Position	In-line; no restrictions

Performance Curves

Crack – 34 to 345 Bar (500 to 5000 PSI)

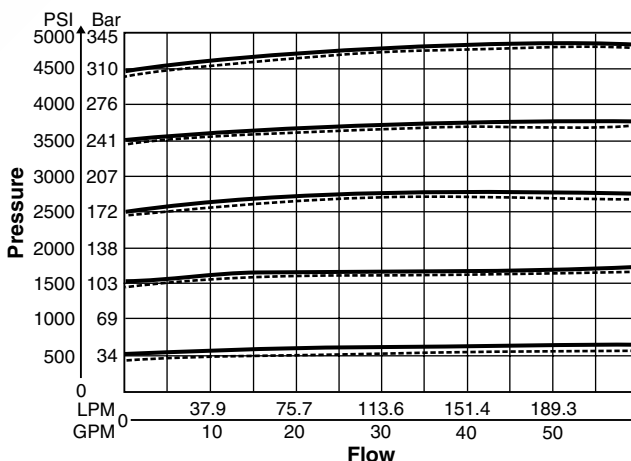

Inch equivalents for millimeter dimensions are shown in (**)

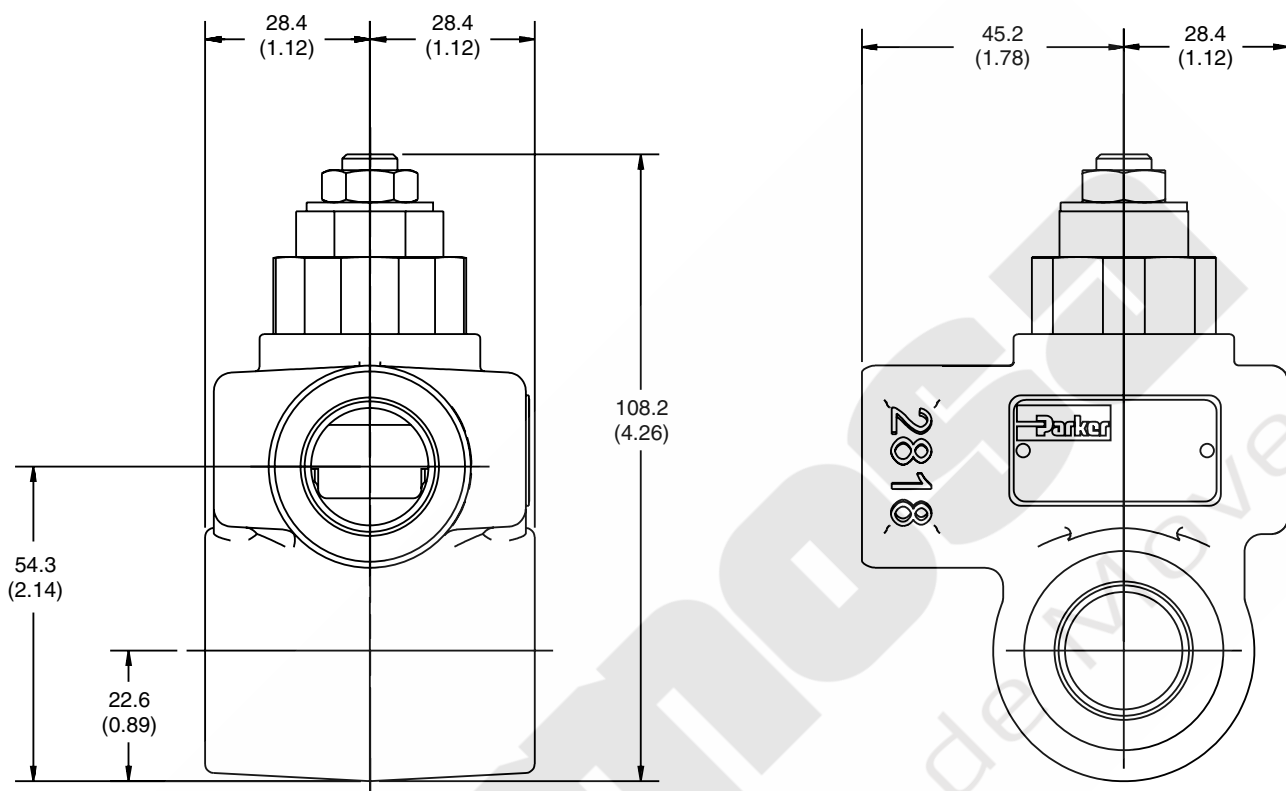

General Description

Series RPL relief valves are pilot operated, ball-type relief valves. Their best application is a main system relief where smooth consistent performance is required.

Operation

The pilot section opens when inlet pressure on the RPL relief valve exceeds the valve setting. This pilot flow creates a pressure imbalance across the main section causing the valve to open. The pilot section closes once the inlet pressure drops below the valve setting. As a result, this re-seats the poppet in the main valve and closes it.

Features

- Compact, low profile design
- Pilot operated for smooth, stable operation
- High tensile, compacted graphite body

Specifications

Input Flow	225 LPM (60 GPM)
Operating Pressure SAE Ports NPTF Ports	350 Bar (5000 PSI) 138 Bar (2000 PSI)
Operating Temperature Range (Ambient)	Nitrile Seals: -40°C to +93°C (-40°F to +200°F)
Material	Body – High strength cast iron Poppet – Hardened and ground steel
Filtration	ISO Code 16/13 SAE Class 4 or better
Mounting Position	In-line; no restrictions

Ordering Information

RPL

—

A


Pilot Operated Relief Valve

Port Size

Adjustment Option


Adjustable

Code	Description
12	SAE 12 (1 1/16" - 12 UN)
16	SAE 16 (1 5/16" - 12 UN)
75	3/4" - 14 NPT
100	1" - 11 1/2 NPT

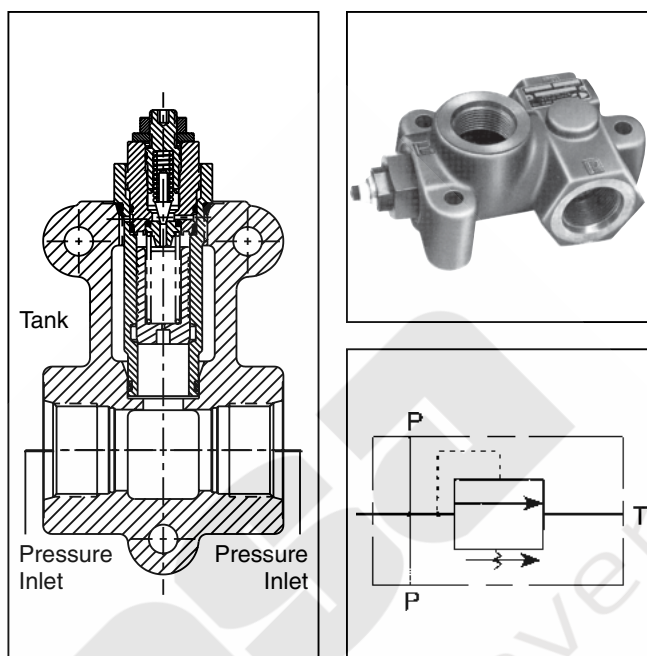

Performance Curves

Crack – 34 to 345 Bar (500 to 5000 PSI)


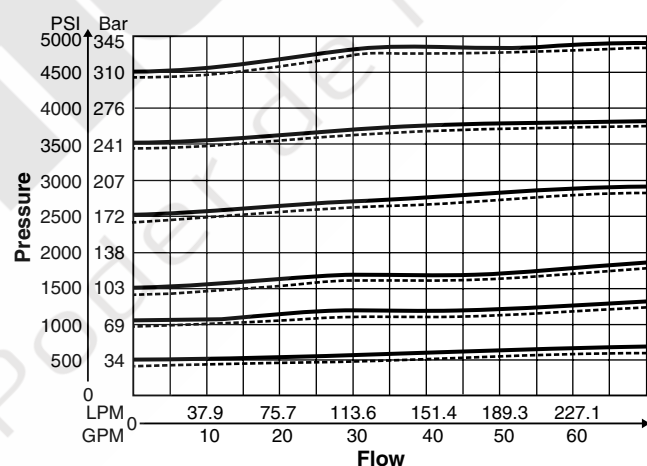


Service Parts

Relief Valve	RP60-A
External Seal – relief valve	3914N-9
Body Kit	
RPL-16	K-RPL-16
RPL-75	K-RPL-75
RPL-100	K-RPL-100
Relief Adjustment	
1/4 turn = 200 PSI ±10%	

Note: The body and the internal parts of the relief valve (including the spring) are non-service items

Inch equivalents for millimeter dimensions are shown in (**)

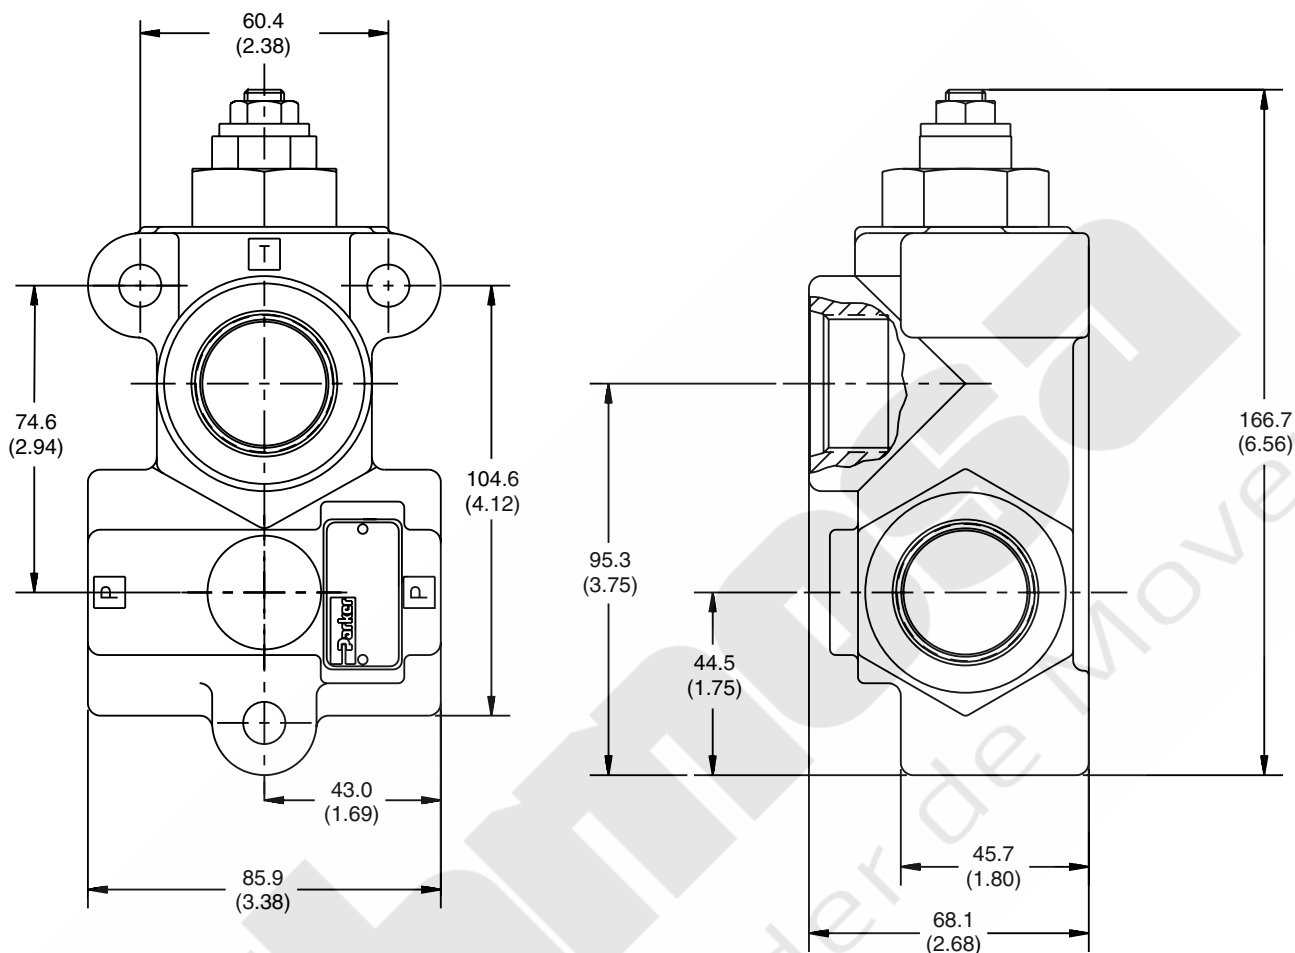

General Description

Series S and SM accessory valves are two-position, three way selector valves. They are designed for directing flow from one single pump to one, or the other of two separate hydraulic lines. An example of this is the operation of two single-acting cylinders, independent of each other.

Series H and HM accessory valves are two-position, three way selector valves. They are designed to be used with a three-position, four way valve to provide a float or free-wheeling condition. Application examples include plows, loaders, and certain winches.

All four versions of this valve should be shifted prior to the application of pressure. The flow forces might make this valve difficult to shift under normal operating pressure and flow conditions.

Operation





Flow enters the valve at the inlet port. When the lever is pushed in, the spool shifts allowing inlet flow to reach the work port furthest away from the lever. When the lever is pulled out, the spool shifts allowing inlet flow to reach the work port closest to the lever.


Features

- Pressure balanced spool
- Chrome plated spool
- High-tensile cast iron body

Specifications

Input Flow 37.5 LPM (10 GPM) 75 LPM (20 GPM) 112.5 LPM (30 GPM) 225 LPM (60 GPM)	HM-8 and HM-50 S-8, SM-8, S-10, S-50 and SM-50 S-12, H-12, S-75 and H-75 S-16, S-100	Operating Temperature Range (Ambient)	Nitrile Seals: -40°C to +93°C (-40°F to +200°F)
		Material	Body – High strength cast iron Spool – Hardened and ground steel
Operating Pressure SAE Ports NPTF Ports	207 Bar (3000 PSI) 138 Bar (2000 PSI)	Filtration	ISO Code 16/13 SAE Class 4 or better
		Mounting Position	In-line; no restrictions

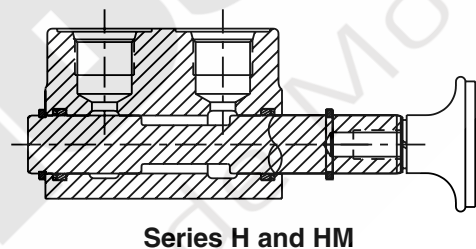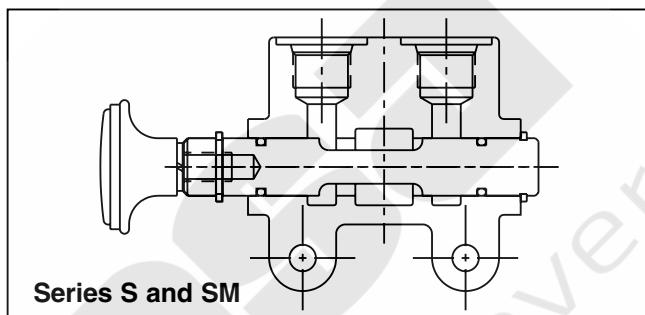

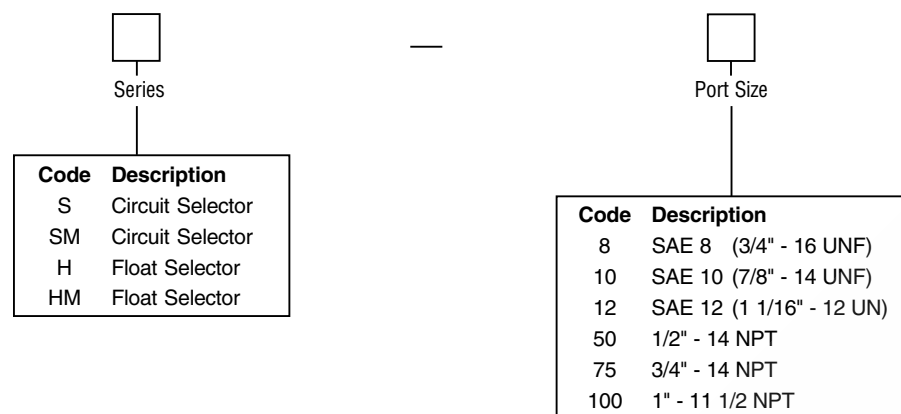

The following models are not available:

H-8 HM-10 SM-10
H-10 HM-12 SM-12
H-16 HM-16 SM-16
H-50 HM-75 SM-75
H-100 HM-100 SM-100


All valves are shipped with a knob.

Service Parts

Knob Kit with Lockwasher all versions	06645001
Clevis Kit	08650235
Spool Seal & Retaining Ring Kit Size 12 and 75 only (H or S)	06492001
Size 8, 10 and 50 only (H or S)	06490001
Size 16 and 100 only (H or S)	06493001
Spool Seal, Retaining Ring & Back-up Ring Kit (HM & SM Only)	11411001

Note: The body and the spool are not service items.

Inch equivalents for millimeter dimensions are shown in (**)

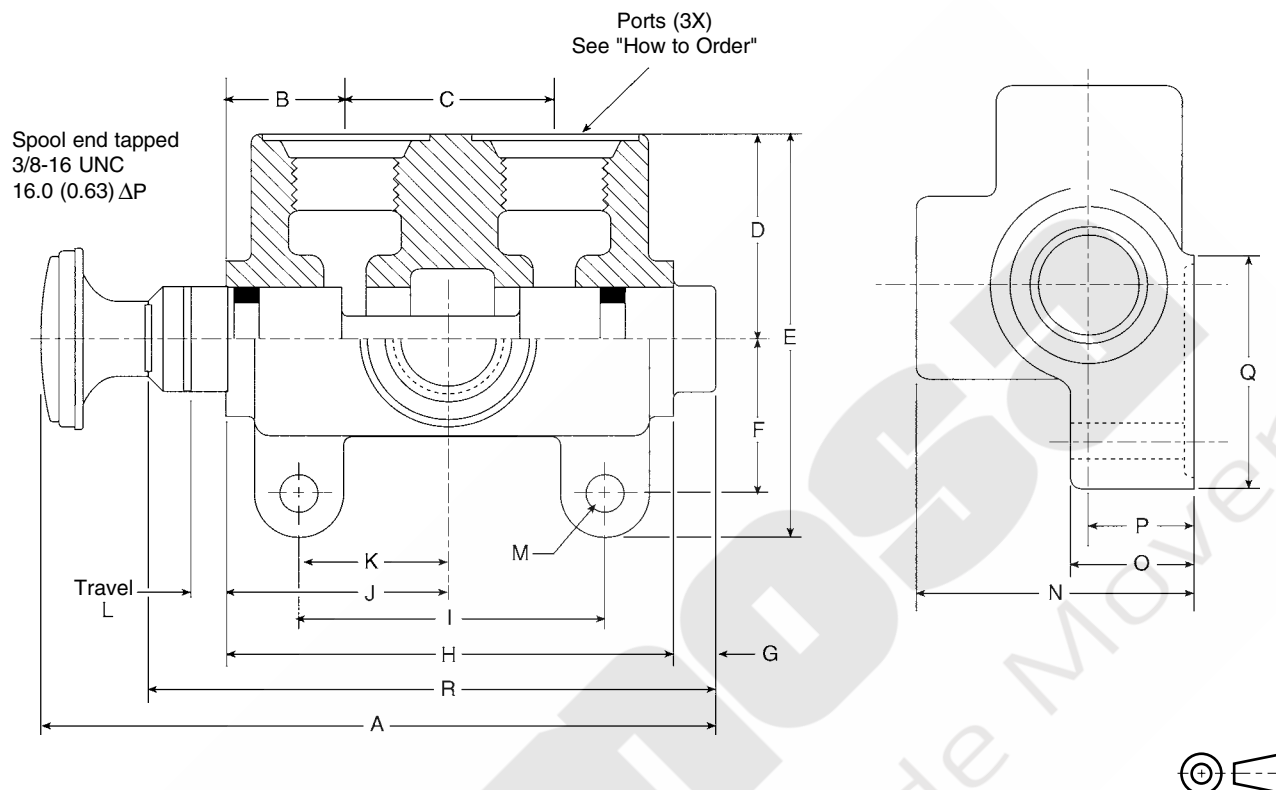


Series	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
S-50	147.1 (5.79)	24.6 (0.97)	41.4 (1.63)	42.9 (1.69)	84.1 (3.31)	30.2 (1.19)	6.4 (0.25)	90.4 (3.56)	54.1 (2.13)	45.2 (1.78)	26.9 (1.06)	7.9 (0.31)	8.9 (0.35)	66.6 (2.62)	28.5 (1.12)	25.4 (1.00)	50.8 (2.00)	117.4 (4.62)
S-75	168.2 (6.62)	28.7 (1.13)	53.9 (2.12)	52.3 (2.06)	101.6 (4.00)	38.1 (1.50)	6.4 (0.25)	111.3 (4.38)	76.2 (3.00)	55.6 (2.19)	38.1 (1.50)	9.7 (0.38)	8.9 (0.35)	66.6 (2.62)	28.5 (1.12)	25.4 (1.00)	58.7 (2.31)	138.2 (5.44)
S-100	188.5 (7.42)	30.2 (1.19)	65.0 (2.56)	57.2 (2.25)	114.3 (4.50)	42.9 (1.69)	6.4 (0.25)	125.5 (4.94)	87.4 (3.44)	62.7 (2.47)	43.7 (1.72)	9.7 (0.38)	10.4 (0.41)	88.9 (3.50)	35.1 (1.38)	31.8 (1.25)	73.2 (2.88)	158.8 (6.25)
H-75	168.2 (6.62)	28.7 (1.13)	53.9 (2.12)	52.3 (2.06)	101.6 (4.00)	38.1 (1.50)	6.4 (0.25)	111.3 (4.38)	76.2 (3.00)	55.8 (2.19)	38.1 (1.50)	9.7 (0.38)	8.9 (0.35)	66.6 (2.62)	28.5 (1.12)	25.4 (1.00)	58.7 (2.31)	138.2 (5.44)

Dimensions**Series SM and HM**

Inch equivalents for millimeter dimensions are shown in (**)


Series SM and HM share a common housing, but have dissimilar spools. Common dimensions are depicted while differences are charted.

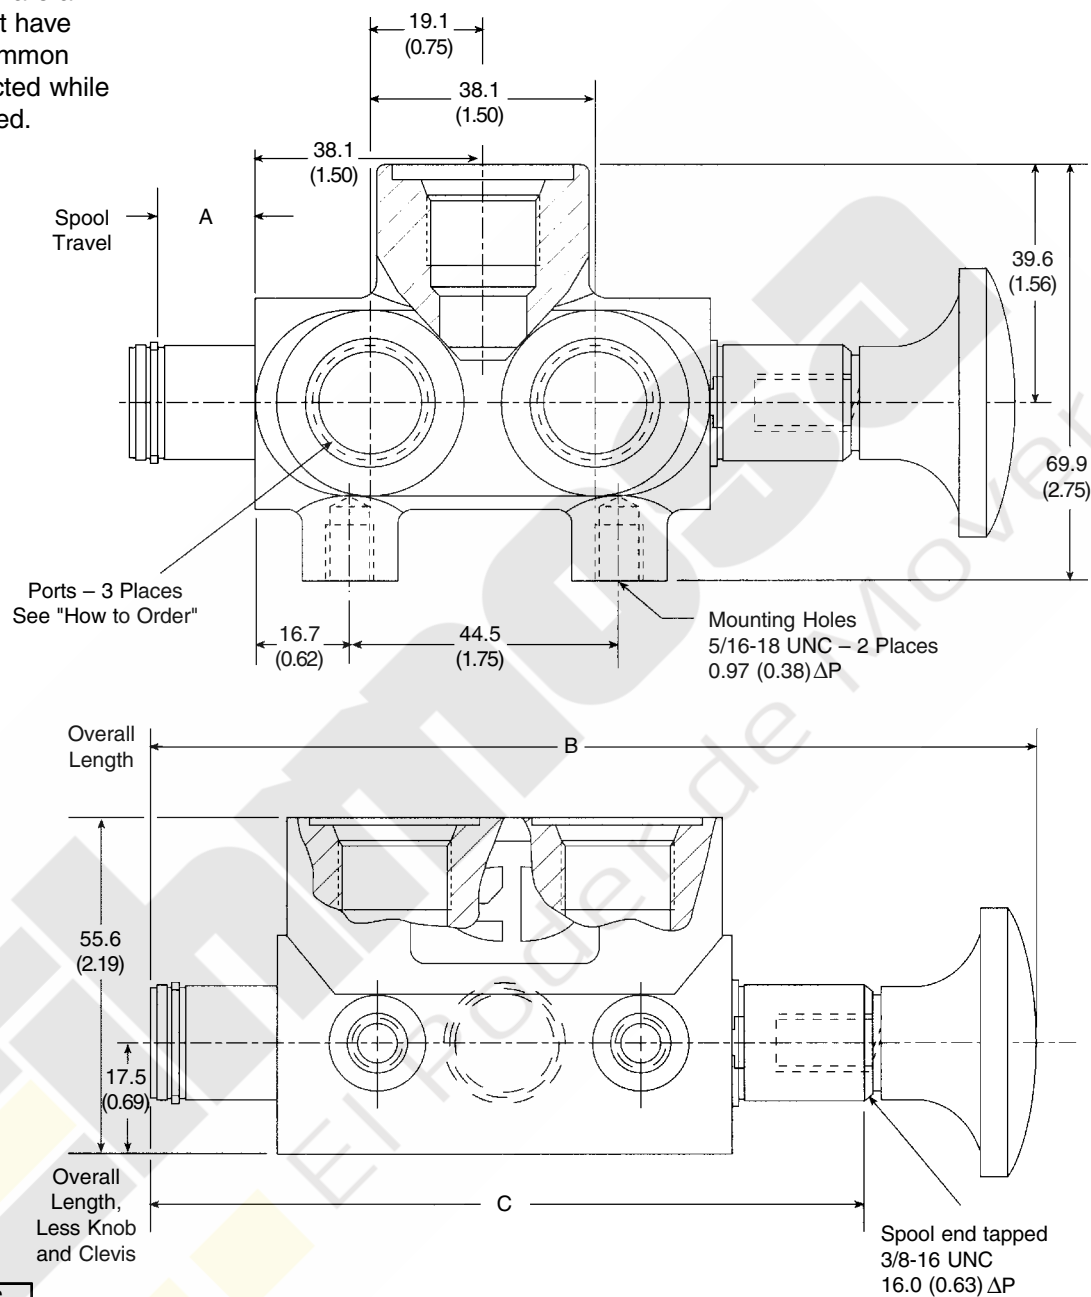

Series	A	B	C
SM	16.0 (0.63)	150.4 (5.92)	120.7 (4.75)
HM	10.4 (0.40)	140.7 (5.54)	111.3 (4.38)




Series S

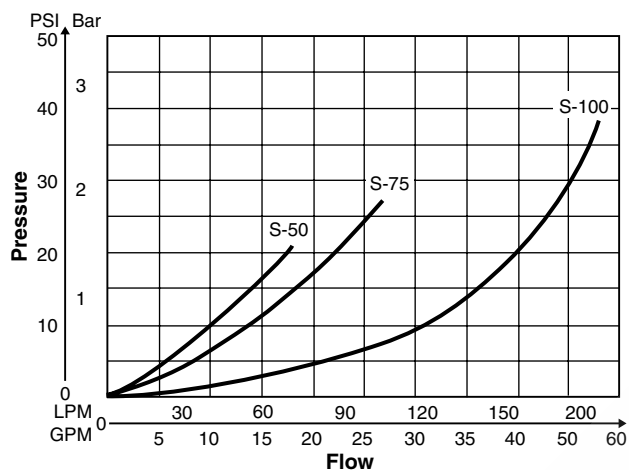


Note: Model S selectors will tolerate flow rates well in excess of those shown here. Consideration should be given to the restrictiveness of the port adaptors.


Series SM

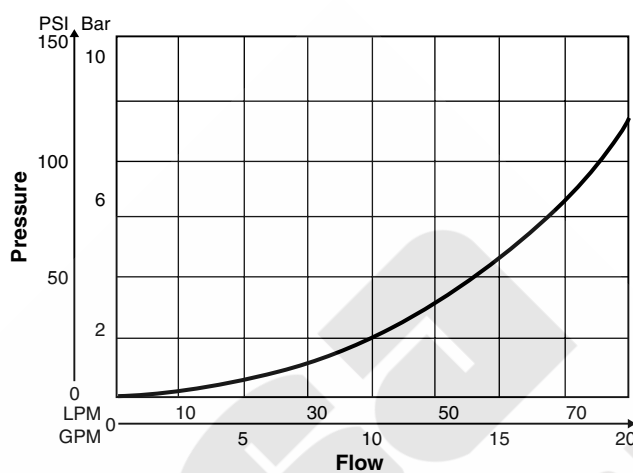

Series H

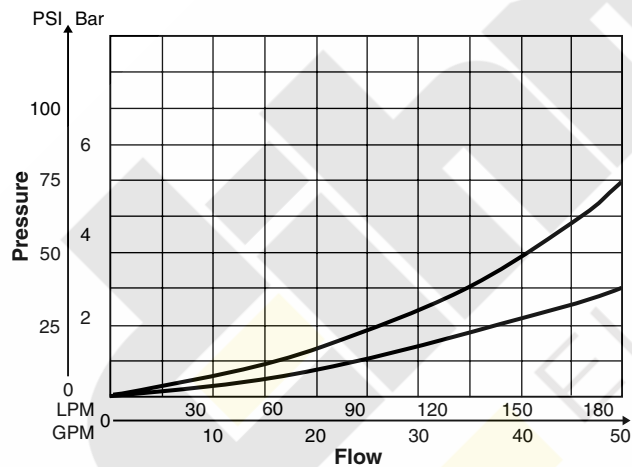

Series HM

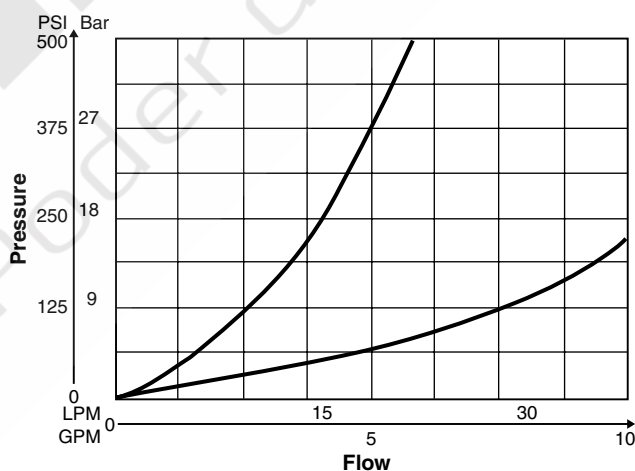

General Description

Series WJL accessory valves are relief valves used for limiting the maximum pressure which can be applied to the portion of the hydraulic circuit where it is connected.

Series WJL relief valves are differential poppet-type relief valves. Their best application is a cylinder port relief where fast response time is required.

Operation

Pressure on the inlet of the WJL relief valve acts on the differential area of the poppet (area difference between the O.D. of the poppet and the seat diameter) to produce a force which is opposed by the spring force. The poppet is pushed off its seat when pressure reaches the valve setting. The spring force re-seats the poppet once the pressure drops below the valve setting.

Features

- Compact, low profile design
- Hardened and ground poppet
- High tensile, compacted graphite body

Specifications


Input Flow	93.75 LPM (25 GPM)
Operating Pressure SAE Ports NPTF Ports	210 Bar (3000 PSI) 138 Bar (2000 PSI)
Operating Temperature Range (Ambient)	Nitrile Seals: -40°C to +93°C (-40°F to +200°F)
Material	Body – High strength cast iron Spool – Hardened and ground steel
Filtration	ISO Code 16/13 SAE Class 4 or better
Mounting Position	In-line; no restrictions

Note: A right angle flow path (former T option) is created by plugging one of the P ports.

Service Parts

Relief Valve Cartridges		Body Kits	
35 - 89 Bar (500 - 1250 PSI)	WHA-1250	WJL-10	K-WJL-10
89 - 142 Bar (1250 - 2000 PSI)	WHA-2000	WJL-50	K-WJL-50
142 - 177 Bar (2000 - 2500 PSI)	WHA-2500	WJL-75	K-WJL-75
177 - 210 Bar (2500 - 3000 PSI)	WHA-3000	Relief Adjustments	
O-Ring Seal Kit	00712223	Screw Adjustment –	
		1/4 turn = 200 PSI ±10%	
		Shim Adjustment – 100 PSI	00462001
		150 - 250 PSI	00459001
		250 - 450 PSI	00458001

Note: The internal parts of the relief valve (including the spring) are non-service items.

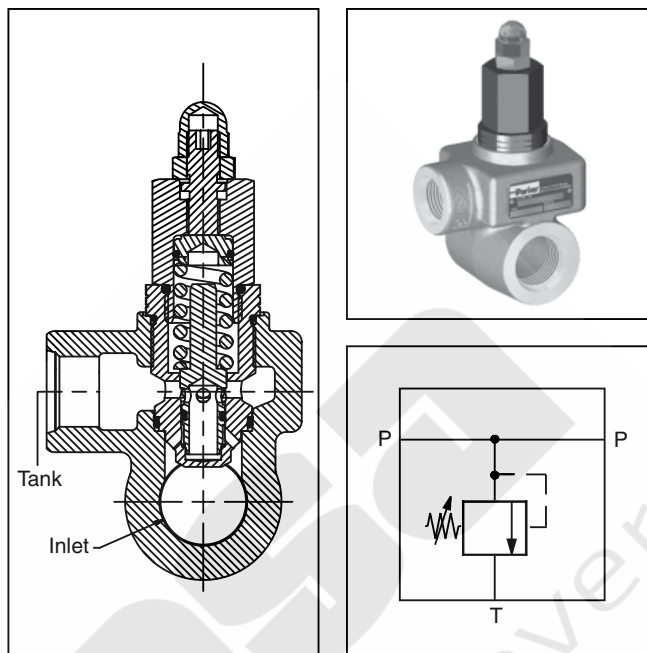


Ordering Information


WJL	—	Port Size	—	Adjustment Option	—	Pressure Range
In-line Mounted WH Differential Poppet Relief Valve						
Code	Description	Code	Description			
10	SAE-10 (7/8" - 14 UNF)	Omit	Shim Adjustable			
12	SAE 12 (1 1/16" - 12 UNF)	A	Screw Adjustable			
50	1/2" - 14 NPT					
75	3/4" - 14 NPT Pressure Ports 12" - 14 NPT Tank Port					
Note: NPT pipe ports are not recommended for pressures above 138 Bar (2000 PSI)						
Code	Setting	Range				
1250	89 Bar (1250 PSI)	35 - 89 Bar (500 - 1250 PSI)				
2000	142 Bar (2000 PSI)	89 - 142 Bar (1250 - 2000 PSI)				
2500	177 Bar (2500 PSI)	142 - 177 Bar (2000 - 2500 PSI)				
3000	210 Bar (3000 PSI)	142 - 210 Bar (2000 - 3000 PSI)				

Performance Curves

Low End – 34 to 207 Bar (500 to 3000 PSI)


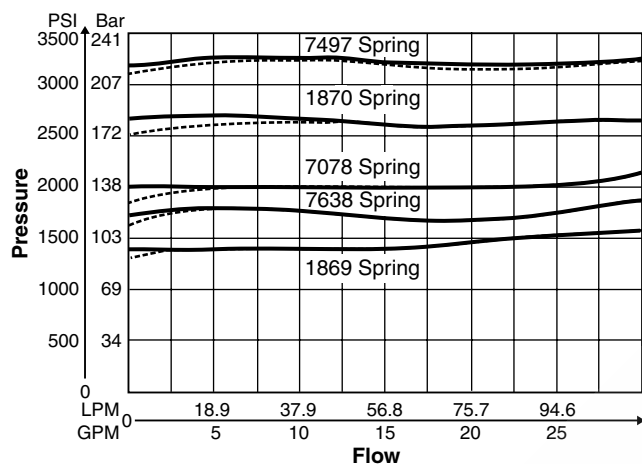


High End – 34 to 207 Bar (500 to 3000 PSI)

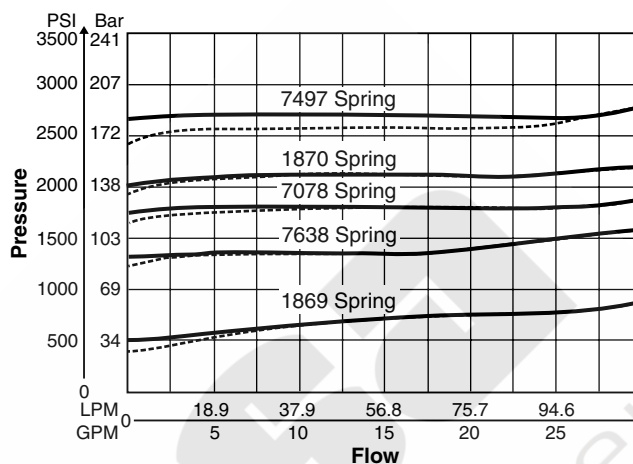

Dimensions

Inch equivalents for millimeter dimensions are shown in (**)

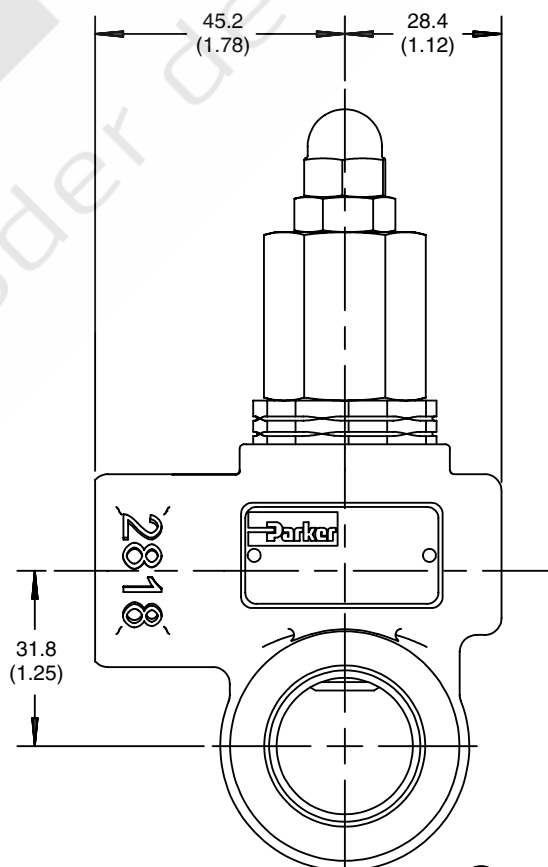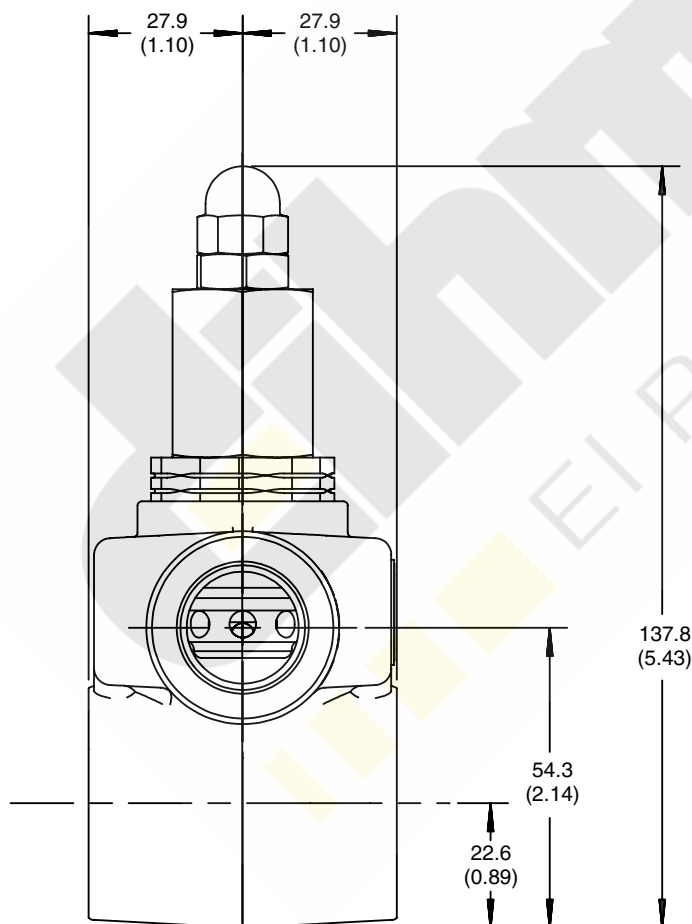

Offer of Sale

The items described in this document and other documents or descriptions provided by Parker Hannifin Corporation, its subsidiaries and its authorized distributors are hereby offered for sale at prices to be established by Parker Hannifin Corporation, its subsidiaries and its authorized distributors. This offer and its acceptance by any customer ("Buyer") shall be governed by all of the following Terms and Conditions. Buyer's order for any such items, when communicated to Parker Hannifin Corporation, its subsidiary or an authorized distributor ("Seller") verbally or in writing, shall constitute acceptance of this offer.

1. Terms and Conditions of Sale: All descriptions, quotations, proposals, offers, acknowledgments, acceptances and sales of Seller's products are subject to and shall be governed exclusively by the terms and conditions stated herein. Buyer's acceptance of any offer to sell is limited to these terms and conditions. Any terms or conditions in addition to, or inconsistent with those stated herein, proposed by Buyer in any acceptance of an offer by Seller, are hereby objected to. No such additional, different or inconsistent terms and conditions shall become part of the contract between Buyer and Seller unless expressly accepted in writing by Seller. Seller's acceptance of any offer to purchase by Buyer is expressly conditional upon Buyer's assent to all the terms and conditions stated herein, including any terms in addition to, or inconsistent with those contained in Buyer's offer. Acceptance of Seller's products shall in all events constitute such assent.

2. Payment: Payment shall be made by Buyer net 30 days from the date of delivery of the items purchased hereunder. Amounts not timely paid shall bear interest at the maximum rate permitted by law for each month or portion thereof that the Buyer is late in making payment. Any claims by Buyer for omissions or shortages in a shipment shall be waived unless Seller receives notice thereof within 30 days after Buyer's receipt of the shipment.

3. Delivery: Unless otherwise provided on the face hereof, delivery shall be made F.O.B. Seller's plant. Regardless of the method of delivery, however, risk of loss shall pass to Buyer upon Seller's delivery to a carrier. Any delivery dates shown are approximate only and Seller shall have no liability for any delays in delivery.

4. Warranty: Seller warrants that the items sold hereunder shall be free from defects in material or workmanship for a period of 18 months from date of shipment from Parker Hannifin Corporation. **THIS WARRANTY COMPRISES THE SOLE AND ENTIRE WARRANTY PERTAINING TO ITEMS PROVIDED HEREUNDER. SELLER MAKES NO OTHER WARRANTY, GUARANTEE, OR REPRESENTATION OF ANY KIND WHATSOEVER. ALL OTHER WARRANTIES, INCLUDING BUT NOT LIMITED TO, MERCHANTABILITY AND FITNESS FOR PURPOSE, WHETHER EXPRESS, IMPLIED, OR ARISING BY OPERATION OF LAW, TRADE USAGE, OR COURSE OF DEALING ARE HEREBY DISCLAIMED. NOTWITHSTANDING THE FOREGOING, THERE ARE NO WARRANTIES WHATSOEVER ON ITEMS BUILT OR ACQUIRED WHOLLY OR PARTIALLY, TO BUYER'S DESIGNS OR SPECIFICATIONS.**

5. Limitation Of Remedy: SELLER'S LIABILITY ARISING FROM OR IN ANY WAY CONNECTED WITH THE ITEMS SOLD OR THIS CONTRACT SHALL BE LIMITED EXCLUSIVELY TO REPAIR OR REPLACEMENT OF THE ITEMS SOLD OR REFUND OF THE PURCHASE PRICE PAID BY BUYER, AT SELLER'S SOLE OPTION. IN NO EVENT SHALL SELLER BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES OF ANY KIND OR NATURE WHATSOEVER, INCLUDING BUT NOT LIMITED TO LOST PROFITS ARISING FROM OR IN ANY WAY CONNECTED WITH THIS AGREEMENT OR ITEMS SOLD HEREUNDER, WHETHER ALLEGED TO ARISE FROM BREACH OF CONTRACT, EXPRESS OR IMPLIED WARRANTY, OR IN TORT, INCLUDING WITHOUT LIMITATION, NEGLIGENCE, FAILURE TO WARN OR STRICT LIABILITY.

6. Changes, Reschedules and Cancellations: Buyer may request to modify the designs or specifications for the items sold hereunder as well as the quantities and delivery dates thereof, or may request to cancel all or part of this order, however, no such requested modification or cancellation shall become part of the contract between Buyer and Seller unless accepted by Seller in a written amendment to this Agreement. Acceptance of any such requested modification or cancellation shall be at Seller's discretion, and shall be upon such terms and conditions as Seller may require.

7. Special Tooling: A tooling charge may be imposed for any special tooling, including without limitation, dies, fixtures, molds and patterns, acquired to manufacture items sold pursuant to this contract. Such special tooling shall be and remain Seller's property notwithstanding payment of any charges by Buyer. In no event will Buyer acquire any interest in apparatus belonging to Seller which is utilized in the manufacture of the items sold hereunder, even if such apparatus has been specially converted or adapted for such manufacture and notwithstanding any charges

paid by Buyer. Unless otherwise agreed, Seller shall have the right to alter, discard or otherwise dispose of any special tooling or other property in its sole discretion at any time.

8. Buyer's Property: Any designs, tools, patterns, materials, drawings, confidential information or equipment furnished by Buyer or any other items which become Buyer's property, may be considered obsolete and may be destroyed by Seller after two (2) consecutive years have elapsed without Buyer placing an order for the items which are manufactured using such property. Seller shall not be responsible for any loss or damage to such property while it is in Seller's possession or control.

9. Taxes: Unless otherwise indicated on the face hereof, all prices and charges are exclusive of excise, sales, use, property, occupational or like taxes which may be imposed by any taxing authority upon the manufacture, sale or delivery of the items sold hereunder. If any such taxes must be paid by Seller or if Seller is liable for the collection of such tax, the amount thereof shall be in addition to the amounts for the items sold. Buyer agrees to pay all such taxes or to reimburse Seller therefore upon receipt of its invoice. If Buyer claims exemption from any sales, use or other tax imposed by any taxing authority, Buyer shall save Seller harmless from and against any such tax, together with any interest or penalties thereon which may be assessed if the items are held to be taxable.

10. Indemnity For Infringement of Intellectual Property Rights: Seller shall have no liability for infringement of any patents, trademarks, copyrights, trade dress, trade secrets or similar rights except as provided in this Part 10. Seller will defend and indemnify Buyer against allegations of infringement of U.S. Patents, U.S. Trademarks, copyrights, trade dress and trade secrets (hereinafter 'Intellectual Property Rights'). Seller will defend at its expense and will pay the cost of any settlement or damages awarded in an action brought against Buyer based on an allegation that an item sold pursuant to this contract infringes the Intellectual Property Rights of a third party. Seller's obligation to defend and indemnify Buyer is contingent on Buyer notifying Seller within ten (10) days after Buyer becomes aware of such allegations of infringement, and Seller having sole control over the defense of any allegations or actions including all negotiations for settlement or compromise. If an item sold hereunder is subject to a claim that it infringes the Intellectual Property Rights of a third party, Seller may, at its sole expense and option, procure for Buyer the right to continue using said item, replace or modify said item so as to make it noninfringing, or offer to accept return of said item and return the purchase price less a reasonable allowance for depreciation. Notwithstanding the foregoing, Seller shall have no liability for claims of infringement based on information provided by Buyer, or directed to items delivered hereunder for which the designs are specified in whole or part by Buyer, or infringements resulting from the modification, combination or use in a system of any item sold hereunder. The foregoing provisions of this Part 10 shall constitute Seller's sole and exclusive liability and Buyer's sole and exclusive remedy for infringement of Intellectual Property Rights. If a claim is based on information provided by Buyer or if the design for an item delivered hereunder is specified in whole or in part by Buyer, Buyer shall defend and indemnify Seller for all costs, expenses or judgments resulting from any claim that such item infringes any patent, trademark, copyright, trade dress, trade secret or any similar right.

11. Force Majeure: Seller does not assume the risk of and shall not be liable for delay or failure to perform any of Seller's obligations by reason of circumstances beyond the reasonable control of Seller (hereinafter 'Events of Force Majeure'). Events of Force Majeure shall include without limitation, accidents, acts of God, strikes or labor disputes, acts, laws, rules or regulations of any government or government agency, fires, floods, delays or failures in delivery of carriers or suppliers, shortages of materials and any other cause beyond Seller's control.

12. Entire Agreement/Governing Law: The terms and conditions set forth herein, together with any amendments, modifications and any different terms or conditions expressly accepted by Seller in writing, shall constitute the entire Agreement concerning the items sold, and there are no oral or other representations or agreements which pertain thereto. This Agreement shall be governed in all respects by the law of the State of Ohio. No actions arising out of the sale of the items sold hereunder or this Agreement may be brought by either party more than two (2) years after the cause of action accrues.

9/91-P

Parker Hydraulics International Sales Offices

North America

Hydraulics Group Headquarters

6035 Parkland Boulevard
Cleveland, OH 44124-4141 USA
Tel: 216-896-3000
Fax: 216-896-4031

Motion & Control Sales Division

651 Robbins Drive PO Box 3500
Troy, MI 48007-3500 USA
Tel: 248-589-2400
Fax: 248-577-4890

Motion & Control Sales Division – Canada

8485 Parkhill Drive
Milton, Ontario L9T 5E9 Canada
Tel: 905-693-3000
Fax: 905-876-0788

Mobile Sales

Mobile Systems Division

595 Schelter Road
Suite 100
Lincolnshire, IL 60069 USA
Tel: 847-821-1500
Fax: 847-821-7600

Pacific Region

16655 Noyes Avenue
Irvine, CA 92606 USA
Tel: 949-660-7033
Fax: 949-852-9577

Great Plains Region

931 Alice Court
St. Charles, IL 60174 USA
Tel: 630-377-0271
Fax: 630-377-0271

Midwest Region

4494 32nd Street
Grinnell, IA 50112 USA
Tel: 641-236-3694
Fax: 641-236-8884

Southern Region

2300 Bush Circle
Carrollton, TX 75007 USA
Tel: 972-307-2949
Fax: 972-307-9410

Eastern Region

100 Corporate Drive
Lebanon, NJ 08833 USA
Tel: 610-330-0970
Fax: 925-396-6481

Industrial Sales

Great Lakes Region

3700 Embassy Parkway
Suite 260
Fairlawn, OH 44333 USA
Tel: 330-670-2680
Fax: 330-670-2681

Southern Region

1225 Old Alpharetta Road
Suite 290
Alpharetta, GA 30005 USA
Tel: 770-619-9767
Fax: 770-619-9806

Chicago Region

1163 E. Ogden Avenue
Suite 705, #358
Naperville, IL 60563 USA
Tel: 630-964-0796
Fax: 866-473-9274

Pacific Region

16655 Noyes Avenue
Irvine, CA 92606 USA
Tel: 949-660-7033
Fax: 949-852-9577

Eastern Region

100 Corporate Drive
Lebanon, NJ 08833 USA
Tel: 908-236-4121
Fax: 908-236-4146

Europe

Europe Hydraulics Group

Parker Hannifin Corporation

Parker House
55 Maylands Avenue
Hemel Hempstead, Herts
HP2 4SJ England
Tel: 44 1442 458000
Fax: 44 1442 458085

Austria

Parker Hannifin GmbH
Badener Strasse 12
A-2700 Wiener Neustadt, Austria
Tel: 43 2622 23501-96
Fax: 43 2622 23501-977

Belgium

Parker Hannifin SA NV
Parc Industriel Sud, Zone II
Rue du Bosquet 23
B-1400 Nivelles, Belgium
Tel: 32 67 280900
Fax: 32 67 280999

Czech Republic

Parker Hannifin s.r.o.
Prumyclova zona Kecany
250 67 Klecany, Czech Republic
Tel: 420 24 083 111

Denmark

Parker Hannifin Denmark A/S
Industriparken 37
2750 Ballerup, Denmark
Tel: 45 43 56 04 00
Fax: 45 43 73 31 07

Europe

Finland

Parker Hannifin Oy
Ylästöntie 16
FIN-01510 Vantaa, Finland
Tel: 358 9 476 731
Fax: 358 9 4767 3200

France

Parker Hannifin France SAS

142, rue de la Foret
74130 Contamine sur Arve, France
Tel: 33 450 25 80 25
Fax: 33 450 25 24 25

Germany

Parker Hannifin GmbH

Gutenbergstrasse 38
41564 Kaarst, Germany
Tel: 49 (0)2131 4016 0
Fax: 49 (0)2131 4016 9199

Greece

Parker Hannifin Corporation

Athens Representative Office

197 Syngrou Av.
171 21 Nea Smyrni, Athens, Greece
Tel: 0030 210 933-6450
Fax: 0030 210 933-6451

Hungary

Parker Hannifin Corporation

Hungarian Trade Representative Office

H-1149 Budapest
Egressy u. 100, Hungary
Tel: 36 12204155
Fax: 36 14221525

Ireland

Parker Hannifin Ireland Ltd.

Blackthorn Close,
Stillorgan Industrial Park
Blackrock, Co Dublin, Ireland
Tel: 353 1 293 9999
Fax 353 1 293 9900

Italy

Parker Hannifin S.p.A.

Via Privata Archimede 1
20094 Corsico (MI), Italy
Tel: 39 02 451921
Fax: 39 02 4479340

The Netherlands

Parker Hannifin B.V.

Edisonstraat 1
7570 AT Oldenzaal, The Netherlands
Tel: 31 541 585000
Fax: 31 541 585459

Norway

Parker Hannifin A/S

Berghagan
PO Box 3008
N-1402 Ski, Norway
Tel: 47 64 911000
Fax: 47 64 911090

(continued on next page)

Parker Hydraulics International Sales Offices

Europe

Poland

Parker Hannifin Sp z.o.o.
ul. Parowcowa 8B
PL 02-445 Warsaw, Poland
Tel: 48 22 8634942
Fax: 48 22 8634944

Portugal

Parker Hannifin Portugal, Lda.
Travessa da Bateria 184 R/C
Dto./1 Esq.
Leca da Palmeiraj-4450-625, Portugal
Tel: 351 22 9997360
Fax: 351 22 9961527

Romania

Hidro Consulting Impex SRL
Bucaresti Parker Representative Office
Bld. Ferdinand nr. 27 Sect. 2
703131 Bucarest, Romania
Tel: 40 21 2521382
Fax: 40 21 2523381

Russia

Parker Hannifin Corporation
Trekhrudniy Pereulok 9, bld.2
Office 106
123001 Moscow, Russia
Tel: 7 095 234 00 54
Fax: 7 095 234 05 28

Slovenia

Parker Hannifin Corporation
Vel. Bucna vas 7
SI-8000 Novo Mesto, Slovenia
Tel: 386 7337 6650
Fax: 386 7337 6651

Spain

Parker Hannifin España SA
Parque Industrial Las Monjas
Calle Estaciones 8
28850 Torrejón de Ardoz
Madrid, Spain
Tel: 34 91 6757300
Fax: 34 91 6757711

Sweden

Parker Hannifin AB
Fagerstagatan 51
Box 8314
SE-163 08 Spånga, Sweden
Tel: 46 (0)8 59 79 5000
Fax: 46 (0)8 59 79 5110

United Kingdom

Parker Hannifin GB Ltd.
Tachbrook Drive Park
Tachbrook Drive
Warwick, CV34 6TU, England
Tel: 44 1926 317878
Fax: 44 1926 317855

Middle East

United Arab Emirates

Parker Hannifin Corporation
PO Box 46451
Abu Dhabi, United Arab Emirates
Tel: 971 2 6788587
Fax: 971 2 6793812

Asia Pacific

Australia Headquarters

Parker Hannifin Pty Ltd.
9 Carrington Road
Castle Hill, NSW 2154, Australia
Tel: 612 9634 7777
Fax: 612 9842 5111

China

Parker Hannifin Beijing Office
Suite B9-11, 21/F, Hanwei Plaza
No. 7 Guanghua Road
Chaoyang District
Beijing, 100004, China
Tel: 86 10 6561 0520
Fax: 86 10 6561 0526

Parker Hannifin Shanghai Office

Room 1101, Peregrine Plaza
1325 Huai Hai Road (M)
Shanghai 200031, China
Tel: 86 21 6445 9339
Fax: 86 21 6445 9717

Hong Kong

Parker Hannifin Hong Kong Ltd.
8/F Kin Yip Plaza
9 Cheung Yee Street
Cheung Sha Wan, Hong Kong
Tel: 852 2428 8008
Fax: 852 2480 4256

India

Parker Hannifin India Pvt Ltd.
Plot No. EL-26, TTC Indl Area
Mahape, Navi Mumbai 400 709, India
Tel: 91 22 55907081-85
Fax: 91 22 55907080

Japan

Parker Hannifin Japan Ltd.
Shirokanedai Building 2nd floor
3-2-10, Shirokanedai
Minato-ku
Tokyo 108-0071, Japan
Tel: 81 3 6408 3900
Fax: 81 3 5449 7201

Korea Headquarters

Parker Hannifin Corporation
777 Jung-ri, Dongtan-myeon
Hwaseong-city
Kyunggi-do, 445-813, Korea
Tel: 82 31 379 2200
Fax: 82 31 377 9710

Parker Hannifin Korea Ltd.

Daehwa Venture Plaza, 6F
169 Samsung-Dong
Kangnam-ku, Seoul, 135-090, Korea
Tel: 82 2 559 0400
Fax: 82 2 556 8187

Singapore

Parker Hannifin Singapore
No. 11, Fourth Chin Bee Road
619702 Jurong Town, Singapore
Tel: 65 6887 6300
Fax: 65 265 5125

Asia Pacific

Taiwan

Parker Hannifin Taiwan Co., Ltd.
No. 40, Wuchuan 3rd Rd.,
Wuku Industrial Park
Taipei County, Taiwan 248, R.O.C.
Tel: 886 2 22988987
Fax: 886 2 22988982

Thailand

Parker Hannifin Thailand Co., Ltd.
1023, 3rd floor, TPS building
Pattanakarn Road, Suanluang
Bangkok 10250, Thailand
Tel: 662 717 8140
Fax: 662 717 8148

Latin America

Pan American Division

7400 N. W. 19th Street, Suite A
Miami, FL 33126 USA
Tel: 305-470-8800
Fax: 305-470-8808

Argentina

Parker Hannifin Argentina SAIC
Stephenson 2711 esq. Costa Rica
1667 Tortuguitas
Buenos Aires, Argentina
Tel: 54 3327 44 4129
Fax: 54 3327 44 4199

Brazil

Hydraulics Division
Parker Hannifin Ind. e Com. Ltd.a.
Av. Frederico Ritter, 1100
Cachoeirinha RS, 94930-000 Brazil
Tel: 55 51 470 9144
Fax: 55 51 470 6909

Chile

Parker Hannifin Chile Ltd.a.
Av. Americo Vespucio 2760-E
Conchali - Santiago, Chile
Tel: 56-2-623-1216
Fax: 56-2-623-1421

Venezuela

Parker Hannifin de Venezuela, S.A.
Av. Principal con calle Miraima
Edificio Draza
Boleita Norte
Caracas, Venezuela
Tel: 58 212 238 5422
Fax: 58 212 239 2272

South Africa

Parker Hannifin Africa Pty Ltd.

Parker Place
10 Berne Avenue Airport
P.O. Box 1153
Kempton Park 1620,
Republic of South Africa
Tel: 27 11 9610700
Fax: 27 11 3927213



Parker Hannifin Corporation
6035 Parkland Blvd.
Cleveland, Ohio 44124-4141
Telephone: (216) 896-3000
Fax: (216) 896-4000
www.parker.com

Parker Hannifin Corporation

About Parker Hannifin Corporation

Parker Hannifin is a leading global motion-control company dedicated to delivering premier customer service. A Fortune 500 corporation listed on the New York Stock Exchange (PH), our components and systems comprise over 1,400 product lines that control motion in some 1,000 industrial and aerospace markets. Parker is the only manufacturer to offer its customers a choice of hydraulic, pneumatic, and electromechanical motion-control solutions. Our Company has the largest distribution network in its field, with over 7,500 distributors serving nearly 400,000 customers worldwide.

Parker's Charter

To be a leading worldwide manufacturer of components and systems for the builders and users of durable goods. More specifically, we will design, market and manufacture products controlling motion, flow and pressure. We will achieve profitable growth through premier customer service.

Product Information

North American customers seeking product information, the location of a nearby distributor, or repair services will receive prompt attention by calling the Parker Product Information Center at our toll-free number: 1-800-C-PARKER (1-800-272-7537). In Europe, call 00800-C-PARKER-H (00800-2727-5374).

The Aerospace Group is a leader in the development, design, manufacture and servicing of control systems and components for aerospace and related high-technology markets, while achieving growth through premier customer service.



The Climate & Industrial Controls Group designs, manufactures and markets system-control and fluid-handling components and systems to refrigeration, air-conditioning and industrial customers worldwide.



The Fluid Connectors Group designs, manufactures and markets rigid and flexible connectors, and associated products used in pneumatic and fluid systems.



The Seal Group designs, manufactures and distributes industrial and commercial sealing devices and related products by providing superior quality and total customer satisfaction.



The Hydraulics Group designs, produces and markets a full spectrum of hydraulic components and systems to builders and users of industrial and mobile machinery and equipment.



The Filtration Group designs, manufactures and markets quality filtration and clarification products, providing customers with the best value, quality, technical support, and global availability.



The Automation Group is a leading supplier of pneumatic and electromechanical components and systems to automation customers worldwide.



The Instrumentation Group is a global leader in the design, manufacture and distribution of high-quality critical flow components for worldwide process instrumentation, ultra-high-purity, medical and analytical applications.





Catalog HY14-3201/US
DIN Slip-In Cartridge Valves

Hydraulic Valve Division
Elyria, Ohio, USA
Tel: (440) 366-5200
Fax: (440) 366-5253



Catalog HY14-2502/US
Industrial Hydraulic Valves

Hydraulic Valve Division
Elyria, Ohio, USA
Tel: (440) 366-5200
Fax: (440) 366-5253



Catalog 2400/US
Mobile Hydraulic Valves

Hydraulic Valve Division
Elyria, Ohio, USA
Tel: (440) 366-5200
Fax: (440) 366-5253



Catalog HY14-2550/US
Electrohydraulic
Motion Control Products

Hydraulic Valve Division
Elyria, Ohio, USA
Tel: (440) 366-5200
Fax: (440) 366-5253



Parker Hannifin Corporation
Hydraulic Valve Division
520 Ternes Avenue
Elyria, Ohio 44035 USA
Tel: (440) 366-5200
Fax: (440) 366-5253
www.parker.com/hydraulicvalve

Catalog HY14-2405/US,
7.5M, 1/05, RRD